

Photoluminescent Tapes


Ultimate
★★★★★
Superior
★★★★★



Photoluminescent Tape

Super α -FLASH (Ultimate)

DIN-Class E

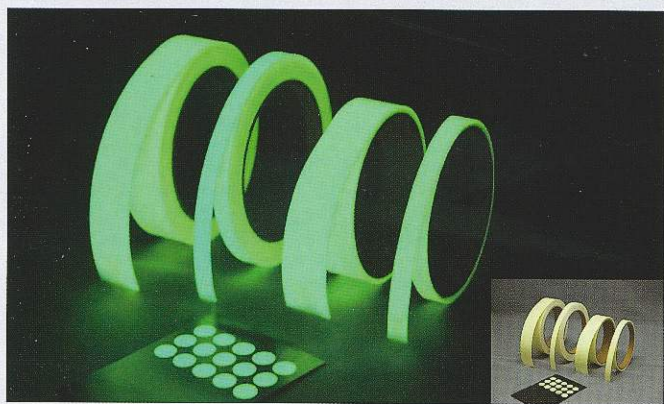

Features

- Luminance and decay time fulfill DIN 67510 Class E (Highest Class) requirements.

Code

Code	Size
SAF1001	10 mm x 1 M
SAF1005	10 mm x 5 M
SAF2501	25 mm x 1 M
SAF2505	25 mm x 5 M
SAF10P	Round sticker 10 mm in diameter, Qty: 15 pieces

Material: PET; Photoluminescent material; Acrylic adhesive
Thickness: 0.56 mm (± 0.1)


Luminance data

Elapsed time	2 min	10 min	30 min	60 min
Luminance (mcd/m ²)	2960	660	210	94
Class E of DIN67510	2200	520	170	70

Measurement of photoluminescence according to DIN 67510 Part 4 : 2008-2

α -FLASH (Superior)

DIN-Class D

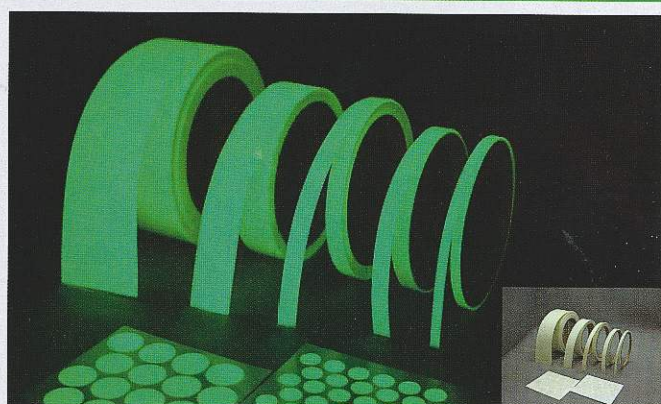

Features

- Luminance and decay time fulfill DIN 67510 Class D (Second Highest Class) requirements.

Code

Code	Size
AF0501	5 mm x 1 M
AF1001	10 mm x 1 M
AF1005	10 mm x 5 M
AF2505	25 mm x 5 M
AF5010	50 mm x 10 M
AF10P	Round sticker 10 mm in diameter, Qty: 36 pieces
AF18P	Round sticker 18 mm in diameter, Qty: 16 pieces

Material: PET; Photoluminescent material; Acrylic adhesive
Thickness: 0.32 mm (± 0.1)

Luminance data

Elapsed time	2 min	10 min	30 min	60 min
Luminance (mcd/m ²)	1406	292	91	40
Class D of DIN67510	1100	260	85	35

Measurement of the photoluminescence according to DIN 67510 Part4:2008-2

★ Do not stick on any rough or jagged surfaces.

Installation examples

[Under daylight]



[In the dark]

