



Since 1979

Electric Wire Rope Hoist



SUNGDO

About SD HOIST	3
Load factor and starting frequency, Specification	4
Type of Hoist	5
Regular Type Suspension Hoist	6-7
Fixed Mounted Hoist	8
Monorail Type Hoist	9-10
Doublerail Type Hoist	11-13
Lowhead Type Hoist	14
Double Lowhead Type Hoist	15
Creep - Monorail Type Hoist	16-17
Creep - Doublerail Type Hoist	18-20
Creep - Lowhead Type Hoist	21
Creep - Double Lowhead Type Hoist	22
Main & Aux Doublerail Type Hoist	23-25
Main & Aux Creep - Doublerail Type Hoist	26-28
Crane Components	29-30
Ordering informations of hoist	31

The hoist and crane specialist
since 1979

Trust our experience
to manage your business





전동호이스트 부하시간율과 시동빈도에 대하여

Trust our experience to manage your business

About load factor of electric hoist and starting frequency

호이스트의 반복운전에 있어서 부하시간율과 시동빈도를 구분하였습니다. 시동빈도를 알맞게 적용하여 Model을 적용하시면, 호이스트 수명을 연장합니다.

We classify load factor and starting frequency through repetition operation of hoist. If you apply starting frequency to a model, you can extend durability of it.

부하시간율과 시동빈도 구분

항목 \ 빈도구분	I	II	III	IV
부하시간율 Load factor	15	25	40	60
시동빈도(회수/시간) Starting frequency	180	200	240	360

부하시간율과 시동빈도 구분(10시간/1일 작업의 경우)

구분 反分	일일평균사용시간 (시간/일) Working time/Day	<1.5	<2.5	<4	<6
경부하 Light	통상50% 이하의 경하중을 사용하며 때때로 정격하중으로 사용 Usually it is used below 50% light load and sometimes, rated load	I	II	III	IV
표준부하 Medium	통상50% ~ 80%의 하중으로 사용하며. 정격하중으로도 사용 Generally, it is used not only 50% ~80% load but also, rated load	I	II	III	IV
중부하 Heavy	정격하중에 가까운 하중으로 자주 사용 It is used as a load close to rated load	II	III	IV	

Specification

Specification	Hoist	Regular Type Hoist		Lowhead Type	Doublerail Type
		Suspension	Motor Driven Trolley	Motor Driven Trolley	Motor Driven Trolley
Push Button and its indication		3-point (emergency, up, down)	5-point (emergency, up, down, <u>east</u> , <u>west</u>) 7-point (emergency, up, down, east, west, <u>south</u> , <u>north</u>)		
Hoist Crossing (Traversing)	Traversing part is assembled separately to the hoist body by using spacers and suspension bolts				
Power Supply	AC phase power source 220V - 50Hz/60Hz X 3ph AC phase power source 380V - 50Hz/60Hz X 3ph AC phase power source 440V - 50Hz/60Hz X 3ph AC phase power source 460V - 50Hz/60Hz X 3ph AC phase power source 480V - 50Hz/60Hz X 3ph				
Ambient Temperature	-10°C ~ 40°C				
Construction	Weather and dust proof				
Utilization Factor	$\%ED = \frac{\text{Motor - powered time(min) in one hour with maximum work rate}}{60(\text{min})} \times 10$				



Monorail Type Hoist



Doublerail Type Hoist



Main Aux type Hoist



Double Lowhead Type Hoist



MC Crab




Clean Room Hoist



Regular Type Suspension Hoist

Trust our experience to manage your business

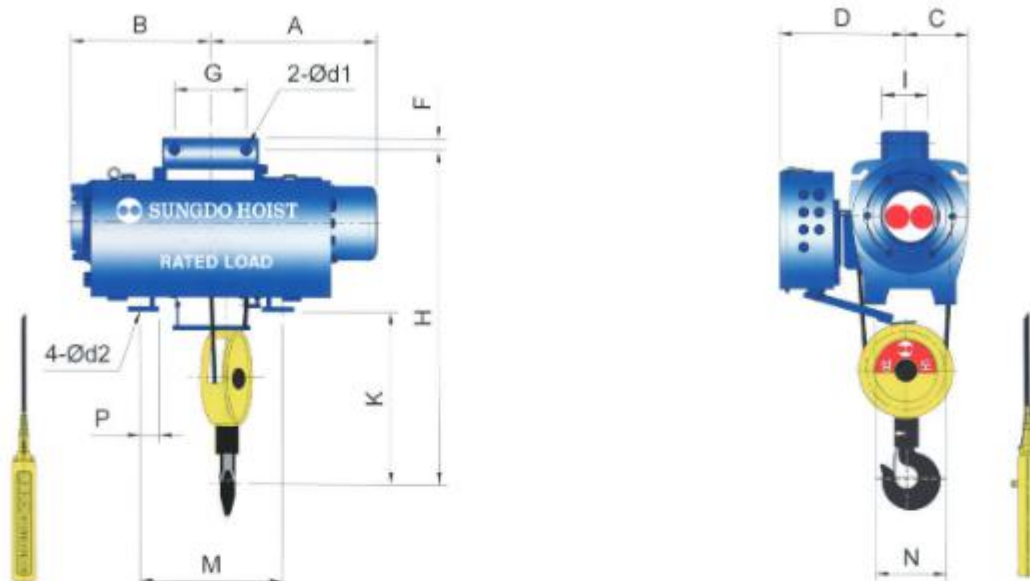

Code			SH1T-S	SH2T-S	SH2.8T-S	SH3T-S	SH5T-S
Capacity (Ton)			1	2	2.8	3	5
Model	Hoisting Speed	High Speed	SM1-H6(12)	SM2-H6(12)	SM2.8-H6(12)	SM3-H6(12)	SM5-H6(12)
		Low Speed	SM1-L6(12)	SM2-L6(12)	SM2.8-L6(12)	SM3-L6(12)	SM5-L6(12)
Hoist	Maximum Lift (m)		6 (12)	6 (12)	6 (12)	6 (12)	6 (12)
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	10/12	8.4 / 10	7.5 / 9	7.5 / 9	4.7 / 5.6
		Low Speed 50/60 (Hz)	6.6 / 8	5.4 / 6.5	3.7 / 4.5	3.7 / 4.5	3.5 / 4.2
	Hoisting Motor (kw x P)	High Speed	2.4 x 4	3.7 x 4	5.0 x 4	5.5 x 4	5.5 x 6
		Low Speed	1.5 x 6	2.5 x 6	2.5 x 8	2.8 x 8	4.2 x 8
	Wire Rope	Construction	6x37, 6x36(WS)	6x37, 6x36(WS)	6x37, 6x36(WS)	6x37, 6x36(WS)	6 x 37
		Dia.(mm) x No. of Ropes	8 x 2	10 x 2	12.5 x 2	12.5 x 2	16 x 2
	Brake		DC Magnet Disc Brake				
	Dimensions (mm) (approx.)		H	750	920	1050	1050
A			410 (510)	480 (580)	530 (630)	530 (630)	620 (720)
B			380 (480)	400 (500)	455 (555)	455 (555)	530 (630)
C			195	210	220	220	260
D			280	320	350	350	395
G			160	200	200	200	280
F			28	35	30	30	45
I			108	146	146	146	176
K			380	480	545	545	695
M			344 (544)	344 (544)	364 (564)	364 (564)	450 (650)
N			160	175	220	220	260
P			50	55	55	55	65
d1			26	33	33	33	47
d2			17	17	17	17	17
Weight (approx. - kg)			170 (198)	260 (290)	340 (390)	340 (390)	550 (610)

Note: Figures in () are for hoists of 12m lift



Regular Type Suspension Hoist



Trust our experience to manage your business



Code			SH7.5T-S	SH10T-S	SH15T-S	SH20T-S
Capacity (Ton)			7.5	10	15	20
Model	Hoisting Speed	High Speed	SM7.5-H12	SM10-H12	SM15-H12	SM20-H12
		Low Speed	SM7.5-L12	-	SM15-L12	SM20-L12
Hoist	Maximum Lift (m)		12	11.5	12	12
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	3.1 / 3.8	3.7 / 4.5	3.5 / 4.2	3.5 / 4.2
		Low Speed 50/60 (Hz)	2.3 / 2.8	-	2.3 / 2.8	2.3 / 2.8
	Hoisting Motor (kw x P)	High Speed	5.5 x 6	9 x 8	13 x 8	17 x 8
		Low Speed	4.2 x 8	-	8.5 x 12	11.5 x 12
	Wire Rope	Construction	6x37, 6x36(WS)	6 x 37	6 x 37	6 x 37
		Dia.(mm) x No. of Ropes	14 x 4	16 x 4	20 x 4	22.4 x 4
	Brake		DC Magnet Disc Brake			
Dimensions (mm) (approx.)		H	1300	1330	1900	1900
		A	940	995	1120	1170
		B	845	935	1095	1145
		C	295	345	400	400
		D	480	555	640	640
		G	800	800	800	850
		I	232	232	272	272
		J	50	50	65	65
		K	700	765	1030	1030
		L	850	850	870	935
		M	1100	1100	1150	1250
		N	400	400	500	500
		P	40	40	40	40
		d1	47	47	63	63
d2	25	25	30	30		
Weight (approx. - kg)			850	1120	1780	2050

Fixed Mounted Hoist

Trust our experience to manage your business

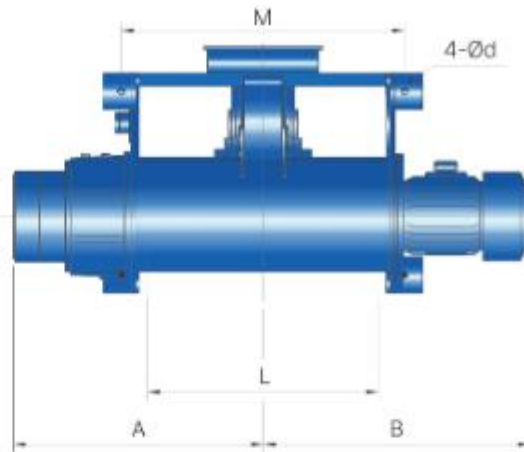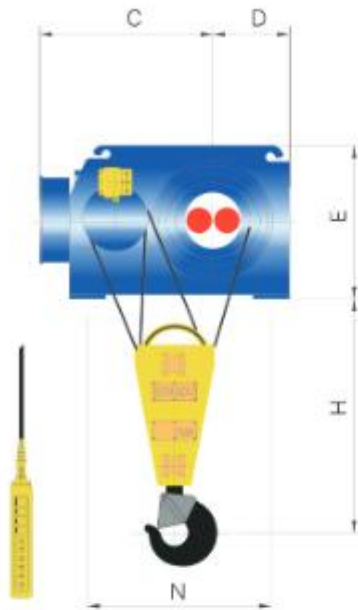

Code			SH35T-F	SH50T-F	SH60T-F	SH70T-F
Capacity (Ton)			35	50	60	70
Model			SD35-H12	SD50-H12	SD60-H12	SD70-H12
Hoist	Maximum Lift (m)		12	12	12	12
	Hoisting Speed (m/min) 50/60 (Hz)		4 / 4.8	2.7 / 3.2	2 / 2.4	2 / 2.4
	Hoisting Motor (kw x P)		33 x 6	33 x 6	33 x 6	33 x 6
	Wire Rope	Construction	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC
		Dia.(mm) x No. of Ropes	28 x 4	28 x 6	28 x 8	28 x 8
	Brake		DC Magnet Disc Brake			
Dimensions (mm) (approx.)		H	1300	1450	1750	1750
		A	1465	1790	2030	2030
		B	1595	1920	2170	2170
		C	560	905	1000	1000
		D	855	1100	1005	1005
		E	1000	1100	1100	1100
		L	1015	1650	2000	2000
		M	1500	2250	2750	2750
		N	1000	1600	1600	1600
		Ø d	47	63	63	63
Weight (approx. - kg)			4300	6850	7800	7800

Monorail Type Hoist

Trust our experience to manage your business



Code			SH1T-N				SH2T-N				SH2.8T-N				SH3T-N				SH5T-N				
Capacity (Ton)			1				2				2.8				3				5				
Model	Hoisting / Traversing Speed	High / High	SM1-H6(12)-MH				SM2-H6(12)-MH				SM2.8-H6(12)-MH				SM3-H6(12)-MH				SM5-H6(12)-MH				
		High / Low	SM1-H6(12)-ML				SM2-H6(12)-ML				SM2.8-H6(12)-ML				SM3-H6(12)-ML				SM5-H6(12)-ML				
		Low / High	SM1-L6(12)-MH				SM2-L6(12)-MH				SM2.8-L6(12)-MH				SM3-L6(12)-MH				SM5-L6(12)-MH				
		Low / Low	SM1-L6(12)-ML				SM2-L6(12)-ML				SM2.8-L6(12)-ML				SM3-L6(12)-ML				SM5-L6(12)-ML				
Hoist	Maximum Lift (m)		6 (12)				6 (12)				6 (12)				6 (12)				6 (12)				
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	10 / 12				8.4 / 10				7.5 / 9				7.5 / 9				4.7 / 5.6				
		Low Speed 50/60 (Hz)	6.6 / 8				5.4 / 6.5				3.7 / 4.5				3.7 / 4.5				3.5 / 4.2				
	Hoisting Motor (kw x P)	High Speed	2.4 x 4				3.7 x 4				5.0 x 4				5.5 x 4				5.5 x 6				
		Low Speed	1.5 x 6				2.5 x 6				2.5 x 8				2.8 x 8				4.2 x 8				
	Wire Rope	Construction	6x37, 6x36(WS)				6x37, 6x36(WS)				6x37, 6x36(WS)				6x37, 6x36(WS)				6 x 37				
		Dia.(mm) x No. of Ropes	8 x 2				10 x 2				12.5 x 2				12.5 x 2				16 x 2				
	Brake		DC Magnet Disc Brake																				
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	17 / 20				20 / 24				20 / 24				20 / 24				20 / 24				
		Low Speed 50/60 (Hz)	12 / 14				13 / 16				13 / 16				13 / 16				13 / 16				
	Traversing Motor (kw x P)	High Speed	0.75 x 4				0.75 x 4				0.75 x 4				0.75 x 4				0.75 x 4				
		Low Speed	0.5 x 6				0.5 x 6				0.5 x 6				0.5 x 6				0.5 x 6				
Dimensions (mm) (approx.)		H	870				980				1115				1115				1325				
		A	410 (470)				480 (530)				530 (580)				530 (580)				625 (690)				
		B	380 (520)				400 (550)				455 (610)				455 (610)				530 (665)				
		D	310				340				380				380				420				
		G	200				225				225				225				276				
		K	200				225				225				225				276				
I-Beam and Spacing (mm)		a x b x t	C	F	S	T	C	F	S	T	C	F	S	T	C	F	S	T	C	F	S	T	
		200 X 100 X 7	430	220	38	46	445	225	35	47	-	-	-	-	-	-	-	-	-	-	-	-	-
		250 X 125 X 7.5	445	220	37	71	450	225	34	72	450	225	34	72	450	225	34	72	470	265	45	80	
		300 X 150 X 10	455	230	37	98	465	235	29	97	465	235	34	97	465	235	34	97	480	275	45	85	
		450 x 175 x 13	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	490	280	32	110
Min. Radius of Curvature (m)		1.5				1.8				1.8				1.8				2.3					
Weight (approx. - kg)		190 (218)				278 (314)				374 (418)				374 (418)				580 (642)					


Note 1. Figures in () are for hoists of 12m lift

2. The size of I-Beam in section is standard for each model. Other I-Beam can also be used (spacer).

3. If there is a curved beam then there should be indication in advance.

Monorail Type Hoist

Trust our experience to manage your business


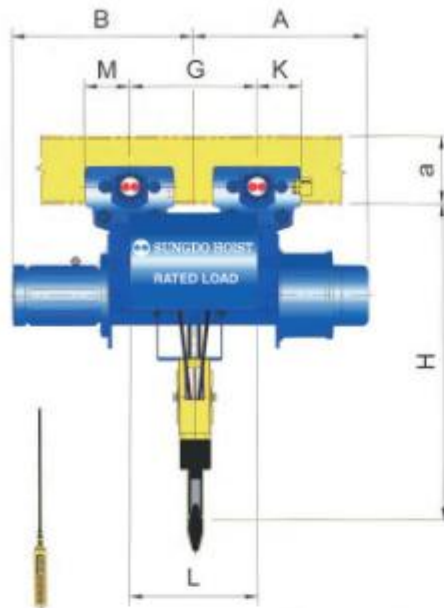


Code			SH7.5T-N				SH10T-N				SH15T-N				SH20T-N				
Capacity (Ton)			7.5				10				15				20				
Model	Hoisting / Traversing Speed	High / High	SM7.5-H12-MH				SM10-H12-MH				SM15-H12-MH				SM20-H12-MH				
		High / Low	SM7.5-H12-ML				SM10-H12-ML				SM15-H12-ML				SM20-H12-ML				
		Low / High	SM7.5-L12-MH				-				SM15-L12-MH				SM20-L12-MH				
		Low / Low	SM7.5-L12-ML				-				SM15-L12-ML				SM20-L12-ML				
Hoist	Maximum Lift (m)		12				11.5				12				12				
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	3.1 / 3.8				3.7 / 4.5				3.5 / 4.2				3.5 / 4.2				
		Low Speed 50/60 (Hz)	2.3 / 2.8				-				2.3 / 2.8				2.3 / 2.8				
	Hoisting Motor (kw x P)	High Speed	5.5 x 6				9 x 8				13 x 8				17 x 8				
		Low Speed	4.2 x 8				-				8.5 x 12				11.5 x 12				
	Wire Rope	Construction	6 x 37, 6 x 36(WS)				6 x 37				6 x 37				6 x 37				
		Dia.(mm) x No. of Ropes	14 x 4				16 x 4				20 x 4				22.4 x 4				
	Brake		DC Magnet Disc Brake																
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15				12.5 / 15				12.5 / 15				12.5 / 15				
		Low Speed 50/60 (Hz)	8.3 / 10				8.3 / 10				8.3 / 10				8.3 / 10				
	Traversing Motor (kw x P)	High Speed	2 x 0.75 x 4				2 x 0.75 x 4				2 x 1.5 x 4				2 x 1.5 x 4				
		Low Speed	2 x 0.5 x 6				2 x 0.5 x 6				2 x 1.0 x 6				2 x 1.0 x 6				
Dimensions (mm) (approx.)		H	1460				1565				2115				2115				
		A	940				995				1120				1170				
		B	845				935				1095				1145				
		D	485				560				640				640				
		L	850				850				870				935				
		G	800				800				800				850				
		K	275				275				295				295				
		M	275				275				295				295				
I-Beam and Spacing (mm)		a x b x t	C	F	S	T	C	F	S	T	C	F	S	T	C	F	S	T	
		300 X 150 X 10	475	295	35	68	475	345	35	68	-	-	-	-	-	-	-	-	-
		450 X 175 X 13	485	295	30	93	485	345	30	93	560	400	32	77	560	400	32	77	
		600 X 190 X 13	495	295	25	118	495	345	25	118	570	400	32	92	570	400	32	92	
Min. Radius of Curvature (m)			For Straight Only																
Weight (approx. - kg)			910				1210				2030				2300				

Note 1. The size of I-Beam in section is standard for each model. Other I-Beam can also be used (spacer).
2. If there is a curved beam then there should be indication in advance.

Doublerail Type Hoist



Trust our experience to manage your business

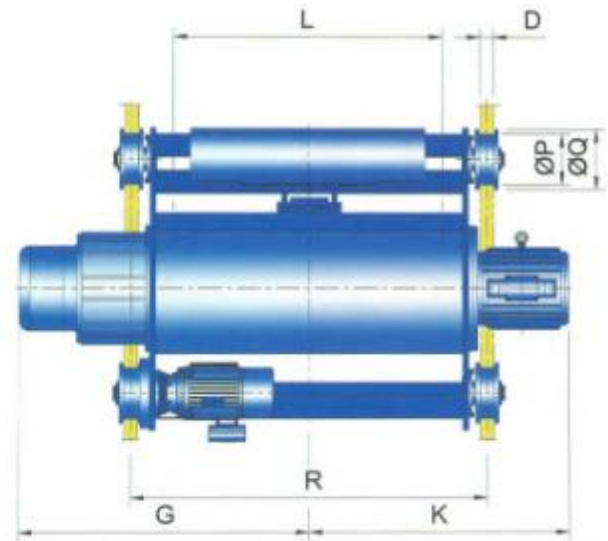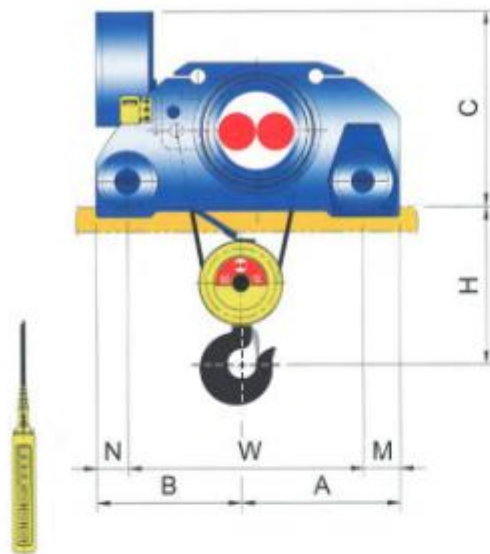

Code			SH2T-D	SH2.8T-D	SH3T-D	SH5T-D
Capacity (Ton)			2	2.8	3	5
Model	Hoisting / Traversing Speed	High / High	SD2-H12-MH	SD2.8-H12-MH	SD3-H12-MH	SD5-H12-MH
		High / Low	SD2-H12-ML	SD2.8-H12-ML	SD3-H12-ML	SD5-H12-ML
		Low / High	SD2-L12-MH	SD2.8-L12-MH	SD3-L12-MH	SD5-L12-MH
		Low / Low	SD2-L12-ML	SD2.8-L12-ML	SD3-L12-ML	SD5-L12-ML
Hoist	Maximum Lift (m)		12	12	12	12
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	8.4 / 10	7.5 / 9	7.5 / 9	4.7 / 5.6
		Low Speed 50/60 (Hz)	5.4 / 6.5	3.7 / 4.5	3.7 / 4.5	3.5 / 4.2
	Hoisting Motor (kw x P)	High Speed	3.7 x 4	5.0 x 4	5.5 x 4	5.5 x 6
		Low Speed	2.5 x 6	2.5 x 8	2.8 x 8	4.2 x 8
	Wire Rope	Construction	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)
		Dia.(mm) x No. of Ropes	8 x 4	9 x 4	9 x 4	12.5 x 4
	Brake		DC Magnet Disc Brake			
T/S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	20 / 24	20 / 24	20 / 24	20 / 24
		Low Speed 50/60 (Hz)	13 / 16	13 / 16	13 / 16	13 / 16
	Traversing Motor (kw x P)	High Speed	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4
		Low Speed	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6
Dimensions (mm) (approx.)		H	415	420	420	510
		R	950	950	950	1150
		A	465	465	465	507
		B	390	390	390	474
		C	545	570	570	630
		G	755	795	795	950
		K	675	720	720	860
		W	650	650	650	760
		D	47	47	47	47
		L	680	690	690	890
		M	112	112	112	119
		N	93	93	93	102
		Ø P	140	140	140	165
		Ø Q	170	170	170	195
Weight (approx. - kg)		450	550	550	850	
Traversing Rail (kg/m)		15	15	15	15	

Doublerail Type Hoist



Trust our experience to manage your business

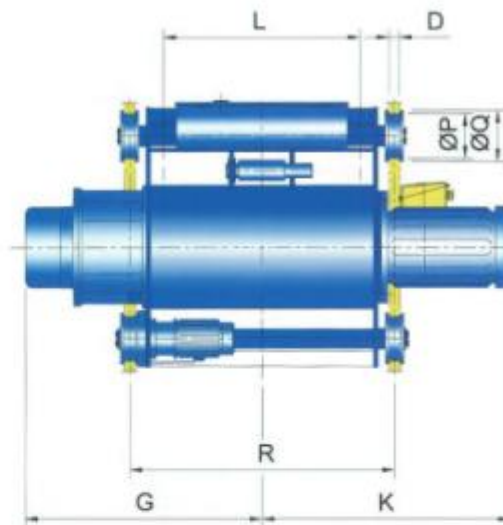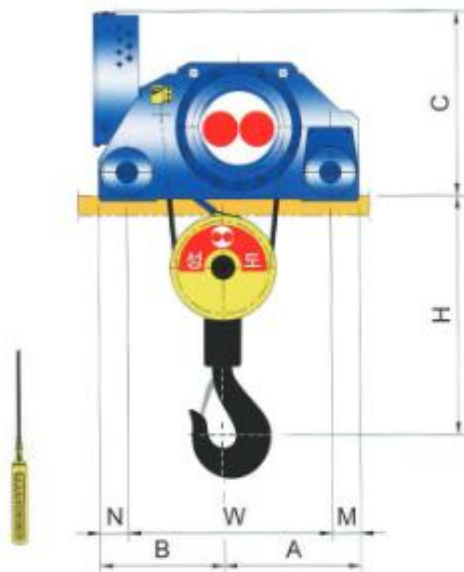

Code			SH7.5T-D	SH10T-D	SH15T-D	SH20T-D	SH30T-D
Capacity (Ton)			7.5	10	15	20	30
Model	Hoisting / Traversing Speed	High / High	SD7.5-H12-MH	SD10-H12-MH	SD15-H12-MH	SD20-H12-MH	SD30-H12-MH
		High / Low	SD7.5-H12-ML	SD10-H12-ML	SD15-H12-ML	SD20-H12-ML	SD30-H12-ML
		Low / High	SD7.5-L12-MH	-	SD15-L12-MH	SD20-L12-MH	SD30-L12-MH
		Low / Low	SD7.5-L12-ML	-	SD15-L12-ML	SD20-L12-ML	SD30-L12-ML
Hoist	Maximum Lift (m)		12	11.5	12	12	12
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	3.1 / 3.8	3.7 / 4.5	3.5 / 4.2	3.5 / 4.2	2.3 / 2.8
		Low Speed 50/60 (Hz)	2.3 / 2.8	-	2.3 / 2.8	2.3 / 2.8	1.5 / 1.8
	Hoisting Motor (kw x P)	High Speed	5.5 x 6	9 x 8	13 x 8	17 x 8	17 x 8
		Low Speed	4.2 x 8	-	8.5 x 12	11.5 x 12	11.5 x 12
	Wire Rope	Construction	6 x 37, 6 x 36(WS)	6 x 37	6 x 37	6 x 37	6 x 37
		Dia.(mm) x No. of Ropes	14 x 4	16 x 4	20 x 4	22.4 x 4	22.4 x 6
	Brake		DC Magnet Disc Brake				
T/S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15	12.5 / 15	12.5 / 15	12.5 / 15	12.5 / 15
		Low Speed 50/60 (Hz)	8.3 / 10	8.3 / 10	8.3 / 10	8.3 / 10	8.3 / 10
	Traversing Motor (kw x P)	High Speed	0.75 x 4	0.75 x 4	1.5 x 4	1.5 x 4	2 x 1.5 x 4
		Low Speed	0.5 x 6	0.5 x 6	1.0 x 6	1.0 x 6	2 x 1.0 x 6
Dimensions (mm) (approx.)		H	730	775	1175	1175	1480
		R	1150	1150	1200	1300	1800
		A	510	565	670	670	930
		B	495	510	610	610	950
		C	645	680	910	910	980
		G	940	985	1120	1170	1430
		K	845	935	1095	1145	1405
		W	800	865	1000	1000	1540
		D	58	58	58	58	70
		L	850	850	870	935	1420
		M	110	110	140	140	180
		N	95	100	140	140	160
		Ø P	165	165	220	220	250
Ø Q	195	195	250	250	280		
Weight (approx. - kg)			900	1200	1850	2300	3450
Traversing Rail (kg/m)			15	15	22	22	30

Doublerail Type Hoist

Trust our experience to manage your business

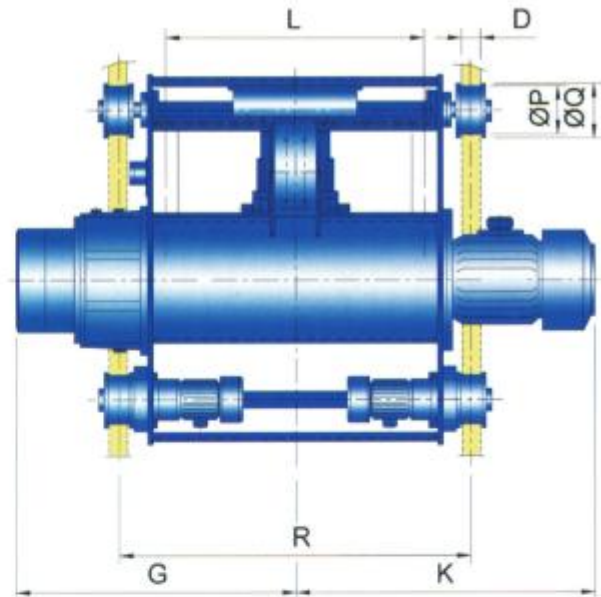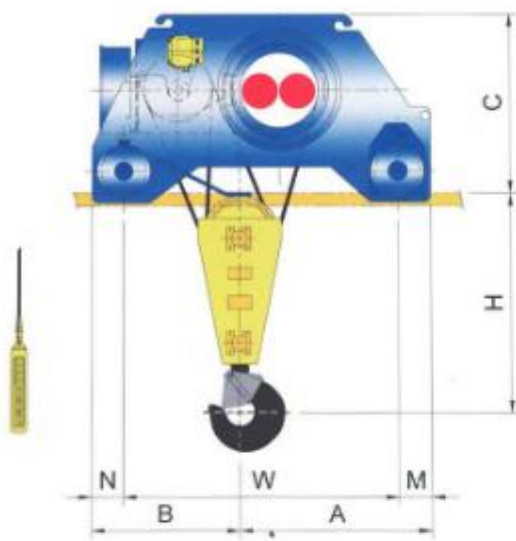

Code			SH35T-D	SH50T-D	SH60T-D	SH70T-D
Capacity (Ton)			35	50	60	70
Model	Traversing Speed	High Speed	SD35-H12-MH	SD50-H12-MH	SD60-H12-MH	SD70-H12-MH
		Low Speed	SD35-H12-ML	SD50-H12-ML	SD60-H12-ML	SD70-H12-ML
Hoist	Maximum Lift (m)		12	12	12	12
	Hoisting Speed (m/min) 50/60 (Hz)		4 / 4.8	2.7 / 3.2	2 / 2.4	2 / 2.4
	Hoisting Motor (kw x P)		33 x 6	33 x 6	33 x 6	33 x 6
	Wire Rope	Construction	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC
		Dia.(mm) x No. of Ropes	28 x 4	28 x 6	28 x 8	28 x 8
	Brake		DC Magnet Disc Brake			
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15	12.5 / 15	12.5 / 15	12.5 / 15
		Low Speed 50/60 (Hz)	8.3 / 10	8.3 / 10	8.3 / 10	8.3 / 10
	Traversing Motor (kw x P)	High Speed	2.2 x 4	2 x 2.2 x 4	2 x 2.2 x 4	2 x 3.7 x 4
		Low Speed	1.5 x 6	2 x 1.5 x 6	2 x 1.5 x 6	2 x 2.2 x 6
Dimensions (mm) (approx.)		H	1300	1450	1750	1750
		R	1600	2300	2800	2800
		A	1025	1432	1525	1525
		B	955	1243	1150	1150
		C	1015	1220	1220	1220
		G	1465	1790	2030	2030
		K	1595	1920	2170	2170
		W	1550	2125	2075	2075
		D	70	80	80	80
		L	1015	1650	2000	2000
		M	215	275	300	300
		N	215	275	300	300
		ØP	355	450	500	500
		ØQ	395	490	540	540
Weight (approx. - kg)		5500	8750	10100	10100	
Traversing Rail (kg/m)		37	37, 50	37, 50	37, 50	



Lowhead Type Hoist

Trust our experience to manage your business





Code			SH1T-L		SH2T-L		SH2.8T-L		SH3T-L		SH5T-L	
Capacity (Ton)			1		2		2.8		3		5	
Model	Hoisting / Traversing Speed	High / High	SL1-H8-MH		SL2-H8-MH		SL2.8-H8-MH		SL3-H8-MH		SL5-H8-MH	
		High / Low	SL1-H8-ML		SL2-H8-ML		SL2.8-H8-ML		SL3-H8-ML		SL5-H8-ML	
		Low / High	SL1-L8-MH		SL2-L8-MH		SL2.8-L8-MH		SL3-L8-MH		SL5-L8-MH	
		Low / Low	SL1-L8-ML		SL2-L8-ML		SL2.8-L8-ML		SL3-L8-ML		SL5-L8-ML	
Hoist	Maximum Lift (m)		6		6		6		6		6	
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	10 / 12		8.4 / 10		7.5 / 9		7.5 / 9		4.7 / 5.6	
		Low Speed 50/60 (Hz)	6.6 / 8		5.4 / 6.5		3.7 / 4.5		3.7 / 4.5		3.5 / 4.2	
	Hoisting Motor (kw x P)	High Speed	2.4 x 4		3.7 x 4		5.0 x 4		5.5 x 4		5.5 x 6	
		Low Speed	1.5 x 6		2.5 x 6		2.5 x 8		2.8 x 8		4.2 x 8	
	Wire Rope	Construction	6 x 19		6 x 37, 6 x 36(WS)		6 x 37, 6 x 36(WS)		6 x 37, 6 x 36(WS)		6 x 37, 6 x 36(WS)	
		Dia.(mm) x No. of Ropes	6 x 4		8 x 4		9 x 4		9 x 4		11.2 x 4	
Brake			DC Magnet Disc Brake									
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	17 / 20		20 / 24		20 / 24		20 / 24		20 / 24	
		Low Speed 50/60 (Hz)	12 / 14		13 / 16		13 / 16		13 / 16		13 / 16	
	Traversing Motor (kw x P)	High Speed	0.75 x 4		0.75 x 4		0.75 x 4		0.75 x 4		0.75 x 4	
		Low Speed	0.5 x 6		0.5 x 6		0.5 x 6		0.5 x 6		0.5 x 6	
Dimensions (mm) (approx.)		H	550		620		620		620		750	
		A	510		605		630		630		720	
		B	480		525		555		555		630	
		C	405		455		510		510		584	
		D	290		385		395		395		466	
		G	200		225		225		225		275	
		K	200		225		225		225		275	
I-Beam and Spacing (mm)		a x b x t	S	T	S	T	S	T	S	T	S	T
		200 X 100 X 7	38	48	34	48	-	-	-	-	-	-
		250 X 125 X 7.5	37	71	34	72	34	72	34	72	45	81
		300 X 150 X 10	37	98	34	97	34	97	34	97	45	88
		450 x 175 x 13	-	-	-	-	-	-	-	-	32	110
Min. Radius of Curvature (m)			1.5		1.8		1.8		1.8		2.3	
Weight (approx. - kg)			200		350		440		440		680	

Note 1. The size of I-Beam in section is standard for each model. Other I-Beam can also be used (spacer).
2. If there is a curved beam then there should be indication in advance.



Double Lowhead Type Hoist

Trust our experience to manage your business

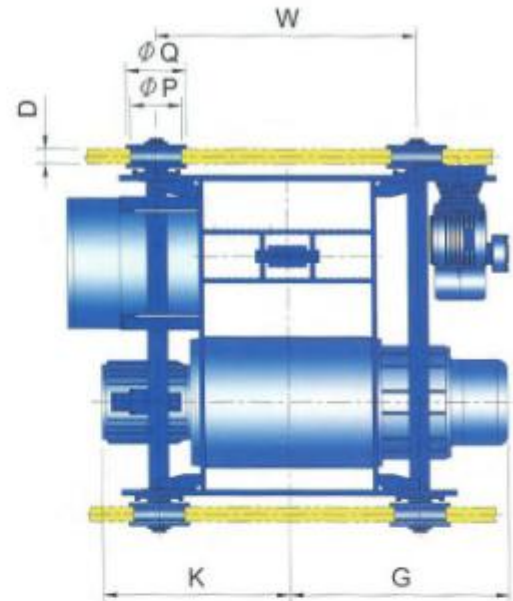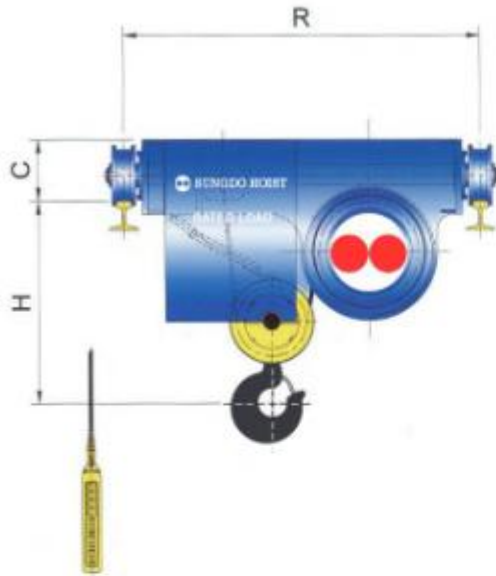

Code			SH2T-DS	SH2.8T-DS	SH3T-DS	SH5T-DS	SH7.5T-DS	SH10T-DS
Capacity (Ton)			2	2.8	3	5	7.5	10
Model	Hoisting / Traversing Speed	High / High	SDL2-H8(12)-MH	SDL2.8-H8(12)-MH	SDL3-H8(12)-MH	SDL5-H8(12)-MH	SDL7.5-H8(12)-MH	SDL10-H12-MH
		High / Low	SDL2-H8(12)-ML	SDL2.8-H8(12)-ML	SDL3-H8(12)-ML	SDL5-H8(12)-ML	SDL7.5-H8(12)-ML	SDL10-H12-ML
		Low / High	SDL2-L8(12)-MH	SDL2.8-L8(12)-MH	SDL3-L8(12)-MH	SDL5-L8(12)-MH	SDL7.5-L8(12)-MH	-
		Low / Low	SDL2-L8(12)-ML	SDL2.8-L8(12)-ML	SDL3-L8(12)-ML	SDL5-L8(12)-ML	SDL7.5-L8(12)-ML	-
Hoist	Maximum Lift (m)		6 (12)	6 (12)	6 (12)	6 (12)	6 (12)	11.5
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	8.4 / 10	7.5 / 9	7.5 / 9	4.7 / 5.6	3.1 / 3.8	3.7 / 4.5
		Low Speed 50/60 (Hz)	5.4 / 6.5	3.7 / 4.5	3.7 / 4.5	3.5 / 4.2	2.3 / 2.8	-
	Hoisting Motor (kw x P)	High Speed	3.7 x 4	5.0 x 4	5.5 x 4	5.5 x 6	5.5 x 6	9 x 8
		Low Speed	2.5 x 6	2.5 x 8	2.8 x 8	4.2 x 8	4.2 x 8	-
	Wire Rope	Construction	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37
		Dia.(mm) x No. of Ropes	8 x 4	9 x 4	9 x 4	11.2(12.5) x 4	14 x 4	16 x 4
	Brake		DC Magnet Disc Brake					
T/S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	20 / 24	20 / 24	20 / 24	20 / 24	12.5 / 15	12.5 / 15
		Low Speed 50/60 (Hz)	13 / 16	13 / 16	13 / 16	13 / 16	8.3 / 10	8.3 / 10
	Traversing Motor (kw x P)	High Speed	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4
		Low Speed	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6
Dimensions (mm) (approx.)		H	585	585	585	600	950	1300
		R	950	950	950	1150	1150	1400
		C	200	200	200	200	200	250
		G	605 (755)	630 (795)	630 (795)	720 (950)	740 (940)	995
		K	525 (675)	555 (720)	555 (720)	630 (860)	640 (845)	935
		W	730 (1060)	730 (1060)	730 (1060)	840 (1300)	840 (1300)	1245
		D	47	47	47	47	58	58
		ØP	140	140	140	165	165	165
		ØQ	170	170	170	195	195	195
Weight (approx. - kg)			420 (470)	450 (500)	450 (500)	750 (810)	790 (890)	1250
Traversing Rail (kg/m)			15	15	15	15	15	15

Note 1. Figures in () are for hoists of 12m lift
 2. Lift height over 6m is available
 3. For 10 ton, only 12m height is available

Creep - Monorail Type Hoist

Trust our experience to manage your business



Code			SH1C-N			SH2C-N			SH2.8C-N			SH3C-N			SH5C-N			
Capacity (Ton)			1			2			2.8			3			5			
Model	Traversing Speed	High Speed	CSM1-H6(12)-MH			CSM2-H6(12)-MH			CSM2.8-H6(12)-MH			CSM3-H6(12)-MH			CSM5-H6(12)-MH			
		Low Speed	CSM1-H6(12)-ML			CSM2-H6(12)-ML			CSM2.8-H6(12)-ML			CSM3-H6(12)-ML			CSM5-H6(12)-ML			
Hoist	Maximum Lift (m)		6 (12)			6 (12)			6 (12)			6 (12)			6 (12)			
	Hoisting Speed / Creep Speed (m/min)	50 (Hz)	10 / 0.7			8.4 / 0.54			7.5 / 0.5			7.5 / 0.5			4.7 / 0.47			
		60 (Hz)	12 / 0.8			10 / 0.65			9 / 0.6			9 / 0.6			5.6 / 0.56			
	Hoisting Motor High / Creep Speed (kw x P)		2.4 / 0.3 x 4 / 6			3.7 / 0.3 x 4 / 6			5.0 / 1.0 x 4 / 6			5.5 / 1.0 x 4/6			5.5 / 1.0 x 6			
	Wire Rope	Construction	6 x 37, 6 x 36(WS)			6 x 37, 6 x 36(WS)			6 x 37, 6 x 36(WS)			6 x 37, 6 x 36(WS)			6 x 37			
		Dia.(mm)xNo. of Ropes	8 x 2			10 x 2			12.5 x 2			12.5 x 2			16 x 2			
	Brake		DC Magnet Disc Brake															
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	17 / 20			20 / 24			20 / 24			20 / 24			20 / 24			
		Low Speed 50/60 (Hz)	12 / 14			13 / 16			13 / 16			13 / 16			13 / 16			
	Traversing Motor (kw x P)	High Speed	0.75 x 4			0.75 x 4			0.75 x 4			0.75 x 4			0.75 x 4			
		Low Speed	0.5 x 6			0.5 x 6			0.5 x 6			0.5 x 6			0.5 x 6			
Dimensions (mm) (approx.)		H	870			980			1115			1115			1325			
		A	600 (655)			630 (680)			745 (795)			745 (795)			845 (905)			
		B	380 (520)			400 (550)			455 (605)			455 (605)			530 (665)			
		D	310			340			380			380			420			
		F	430			455			470			470			495			
		G	200			225			225			225			276			
		K	200			225			225			225			276			
I-Beam and Spacing (mm)		a x b x t	C	S	T	C	S	T	C	S	T	C	S	T	C	S	T	
		200 x 100 x 7	430	38	46	445	35	47	-	-	-	-	-	-	-	-	-	-
		250 x 125 x 7.5	445	37	71	450	34	72	450	34	72	450	34	72	470	45	81	
		300 x 150 x 10	455	37	96	465	34	97	465	34	97	465	34	97	480	45	88	
		450 x 175 x 13	-	-	-	-	-	-	-	-	-	-	-	-	-	490	32	110
Min. Radius of Curvature (m)			1.5			1.8			1.8			1.8			2.3			
Weight (approx. - kg)			225 (245)			320 (355)			415 (460)			415 (460)			635 (700)			


Note 1. Figures in () are for hoists of 12m lift

2. The size of I-Beam in section is standard for each model. Other I-Beam can also be used (spacer).

3. If there is a curved beam then there should be indication in advance.

Creep - Monorail Type Hoist

Trust our experience to manage your business


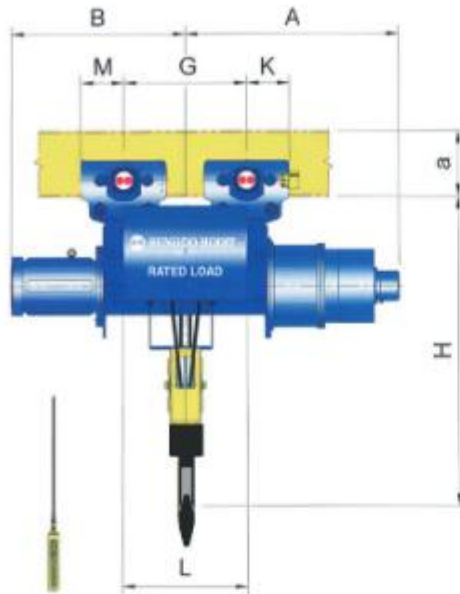


Code			SH7.5C-N			SH10C-N			SH15C-N			SH20C-N		
Capacity (Ton)			7.5			10			15			20		
Model	Traversing Speed	High Speed	CSM7.5-H12-MH			CSM10-H11.5-MH			CSM15-H12-MH			CSM20-H12-MH		
		Low Speed	CSM7.5-H12-ML			CSM10-H11.5-ML			CSM15-H12-ML			CSM20-H12-ML		
Hoist	Maximum Lift (m)		12			11.5			12			12		
	Hoisting Speed / Creep Speed (m/min)	50 (Hz)	3.1 / 0.31			3.7 / 0.37			3.5 / 0.35			3.5 / 0.35		
		60 (Hz)	3.8 / 0.38			4.5 / 0.45			4.2 / 0.42			4.2 / 0.42		
	Hoisting Motor High / Creep Speed (kw x P)		5.5 / 1 x 6			9 / 1.1 x 8			13 / 1.8 x 8			17 / 1.8 x 8		
	Wire Rope	Construction	6 x 37, 6 x 36(VS)			6 x 37			6 x 37			6 x 37		
		Dia.(mm) x No. of Ropes	14 x 4			16 x 4			20 x 4			22.4 x 4		
Brake			DC Magnet Disc Brake											
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15			12.5 / 15			12.5 / 15			12.5 / 15		
		Low Speed 50/60 (Hz)	8.3 / 10			8.3 / 10			8.3 / 10			8.3 / 10		
	Traversing Motor (kw x P)	High Speed	2 x 0.75 x 4			2 x 0.75 x 4			2 x 1.5 x 4			2 x 1.5 x 4		
		Low Speed	2 x 0.5 x 6			2 x 0.5 x 6			2 x 1.0 x 6			2 x 1.0 x 6		
Dimensions (mm) (approx.)		H	1460			1565			2115			2115		
		A	1170			1255			1415			1465		
		B	845			935			1095			1145		
		D	485			560			640			640		
		F	510			525			670			670		
		L	850			850			870			935		
		G	800			800			750			850		
		M	275			275			295			295		
		K	275			275			295			295		
I-Beam and Spacing (mm)		a x b x t	C	S	T	C	S	T	C	S	T	C	S	T
		300 X 150 X 10	475	35	68	475	35	68	-	-	-	-	-	-
		450 X 175 X 13	485	30	93	485	30	93	560	32	77	560	32	77
		600 X 190 X 13	495	32	118	495	32	118	570	37	92	570	37	92
Min. Radius of Curvature (m)			For Straight Only											
Weight (approx. - kg)			970			1290			2300			2520		

Note 1. The size of I-Beam in section is standard for each model. Other I-Beam can also be used (spacer).
 2. If there is a curved beam then there should be indication in advance.

Creep - Doublerrail Type Hoist



Trust our experience to manage your business

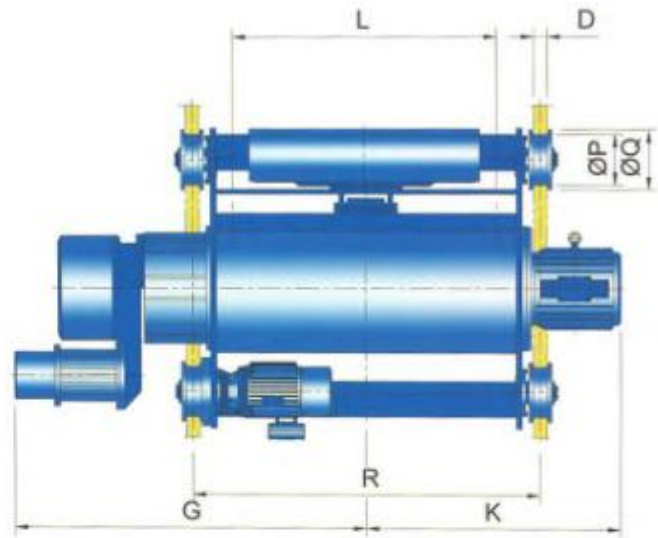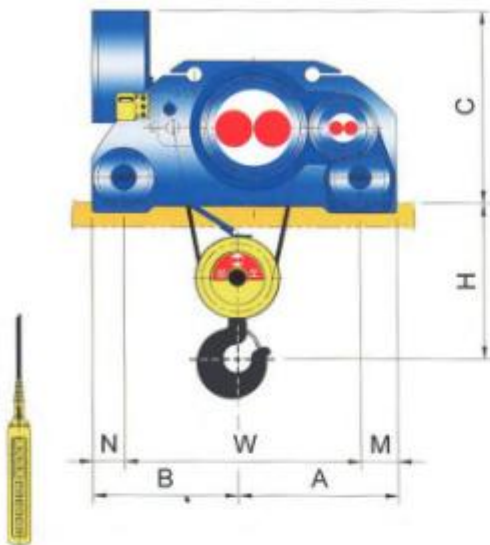

Code			SH2C-D	SH2.8C-D	SH3C-D	SH5C-D
Capacity (Ton)			2	2.8	3	5
Model	Traversing Speed	High Speed	CSD2-H12-MH	CSD2.8-H12-MH	CSD3-H12-MH	CSD5-H12-MH
		Low Speed	CSD2-H12-ML	CSD2.8-H12-ML	CSD3-H12-ML	CSD5-H12-ML
Hoist	Maximum Lift (m)		12	12	12	12
	Hoisting Speed High/ Creep Speed (m/min)	50 (Hz)	8.4 / 0.54	7.5 / 0.5	7.5 / 0.5	4.7 / 0.47
		60 (Hz)	10 / 0.65	9 / 0.6	9 / 0.6	5.6 / 0.56
	Hoisting Motor High / Creep Speed (kw x P)		3.7 / 0.3 x 4 / 6	5.0 / 1.0 x 4 / 6	5.5 / 1.0 x 4 / 6	5.5/1.0 x 6
	Wire Rope	Construction	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)
		Dia.(mm) x No. of Ropes	8 x 4	9 x 4	9 x 4	12.5 x 4
Brake			DC Magnet Disc Brake			
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	20 / 24	20 / 24	20 / 24	20 / 24
		Low Speed 50/60 (Hz)	13 / 16	13 / 16	13 / 16	13 / 16
	Traversing Motor (kw x P)	High Speed	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4
		Low Speed	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6
Dimensions (mm) (approx.)		H	415	420	420	510
		R	950	950	950	1150
		A	465	465	465	507
		B	390	390	390	474
		C	545	570	570	630
		G	905	1010	1010	1170
		K	675	720	720	860
		W	650	650	650	760
		D	47	47	47	47
		L	680	690	690	890
		M	112	112	112	119
		N	93	93	93	102
		ØP	140	140	140	165
		ØQ	170	170	170	195
Weight (approx. - kg)		490	590	590	900	
Traversing Rail (kg/m)		15	15	15	15	

Creep - Doublerrail Type Hoist



Trust our experience to manage your business

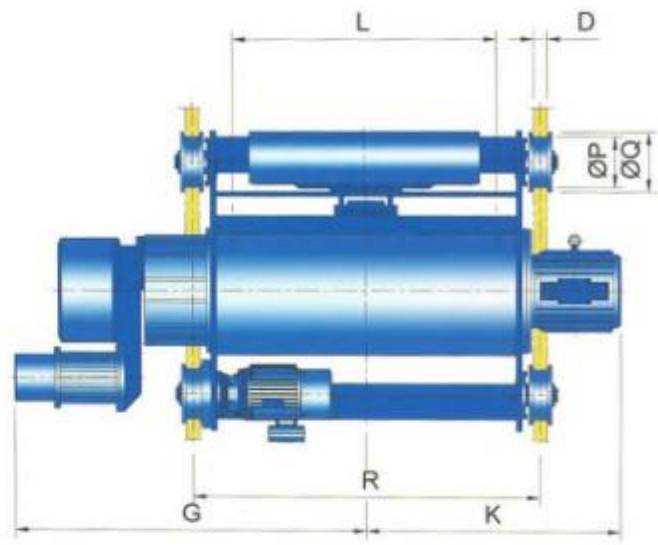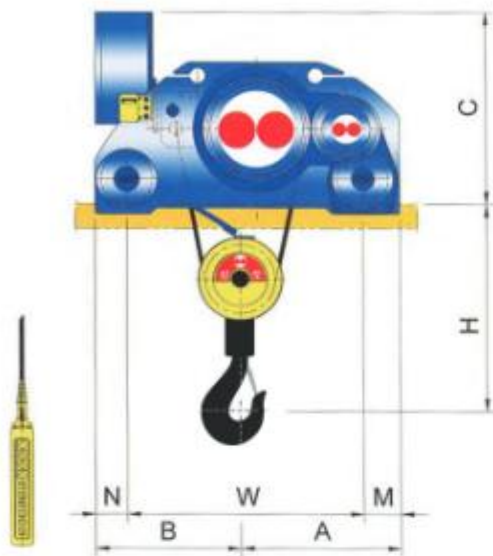

Code			SH7.5C-D	SH10C-D	SH15C-D	SH20C-D
Capacity (Ton)			7.5	10	15	20
Model	Traversing Speed	High Speed	CSD7.5-H12-MH	CSD10-H11.5-MH	CSD15-H12-MH	CSD20-H12-MH
		Low Speed	CSD7.5-H12-ML	CSD10-H11.5-ML	CSD15-H12-ML	CSD20-H12-ML
Hoist	Maximum Lift (m)		12	11.5	12	12
	Hoisting Speed High/ Creep Speed (m/min)	50 (Hz)	3.1 / 0.31	3.7 / 0.37	3.5 / 0.35	3.5 / 0.35
		60 (Hz)	3.8 / 0.38	4.5 / 0.45	4.2 / 0.42	4.2 / 0.42
	Hoisting Motor High / Creep Speed (kw x P)		5.5 / 1 x 6	9 / 1.1 x 8	13 / 1.8 x 8	17 / 1.8 x 8
	Wire Rope	Construction	6 x 37, 6 x 36(WS)	6 x 37	6 x 37	6 x 37
		Dia.(mm) x No. of Ropes	14 x 4	16 x 4	20 x 4	22.4 x 4
Brake			DC Magnet Disc Brake			
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15	12.5 / 15	12.5 / 15	12.5 / 15
		Low Speed 50/60 (Hz)	8.3 / 10	8.3 / 10	8.3 / 10	8.3 / 10
	Traversing Motor (kw x P)	High Speed	0.75 x 4	0.75 x 4	1.5 x 4	1.5 x 4
		Low Speed	0.5 x 6	0.5 x 6	1.0 x 6	1.0 x 6
Dimensions (mm) (approx.)		H	730	775	1175	1175
		R	1150	1150	1200	1300
		A	510	565	670	670
		B	495	510	610	610
		C	645	700	910	910
		G	1170	1255	1415	1465
		K	845	935	1095	1145
		W	800	865	1000	1000
		D	58	58	58	58
		L	850	850	870	935
		M	110	110	140	140
		N	95	100	140	140
		ØP	165	165	220	220
		ØQ	195	195	250	250
Weight (approx. - kg)			955	1265	1920	2385
Traversing Rail (kg/m)			15	15	22	22

Creep - Doublerrail Type Hoist


Trust our experience to manage your business

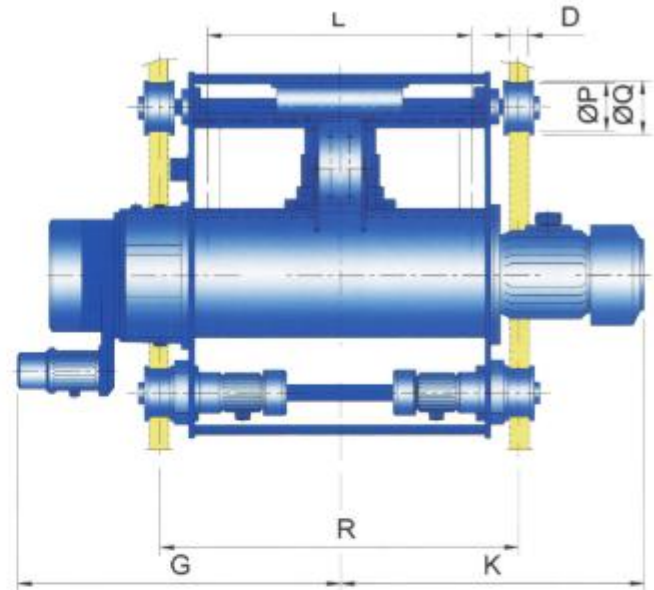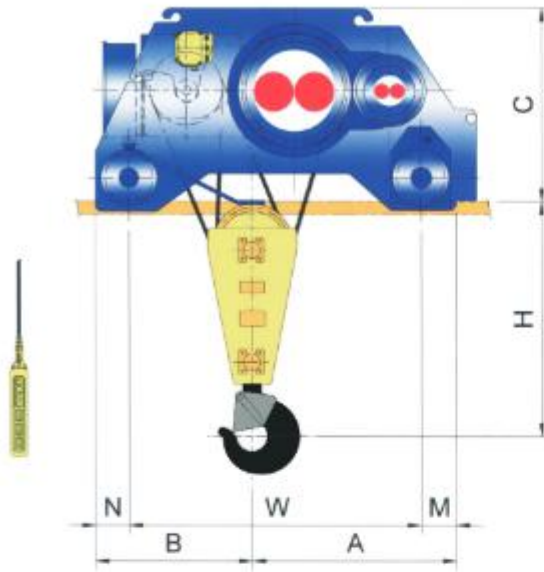

Code			SH30C-D	SH35C-D	SH50C-D	SH60C-D	SH70C-D
Capacity (Ton)			30	35	50	60	70
Model	Traversing Speed	High Speed	CSD30-H12-MH	CSD35-H12-MH	CSD50-H12-MH	CSD60-H12-MH	CSD70-H12-MH
		Low Speed	CSD30-H12-ML	CSD35-H12-ML	CSD50-H12-ML	CSD60-H12-ML	CSD70-H12-ML
Hoist	Maximum Lift (m)		12	12	12	12	12
	Hoisting Speed High/ Creep Speed (m/min)	50 (Hz)	2.3 / 0.23	4 / 0.4	2.7 / 0.27	2 / 0.2	2 / 0.2
		60 (Hz)	2.8 / 0.28	4.8 / 0.48	3.2 / 0.32	2.4 / 0.24	2.4 / 0.24
	Hoisting Motor High / Creep Speed (kw x P)		17 / 1.8 x 8	33 x 6 / 3.7 x 4	33 x 6 / 3.7 x 4	33 x 6 / 3.7 x 4	33 x 6 / 3.7 x 4
	Wire Rope	Construction	6 x 37	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC	6 x Fi (25), (29) IWRC
		Dia.(mm) x No. of Ropes	22.4 x 6	28 x 4	28 x 6	28 x 8	28 x 8
	Brake		DC Magnet Disc Brake				
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15	12.5 / 15	12.5 / 15	12.5 / 15	12.5 / 15
		Low Speed 50/60 (Hz)	8.3 / 10	8.3 / 10	8.3 / 10	8.3 / 10	8.3 / 10
	Traversing Motor (kw x P)	High Speed	2 x 1.5 x 4	2.2 x 4	2 x 2.2 x 4	2 x 2.2 x 4	2 x 3.7 x 4
		Low Speed	2 x 1.0 x 6	1.5 x 6	2 x 1.5 x 6	2 x 1.5 x 6	2 x 2.2 x 6
Dimensions (mm) (approx.)		H	1480	1300	1450	1750	1750
		R	1800	1600	2300	2800	2800
		A	930	1025	1432	1525	1525
		B	950	955	1243	1150	1150
		C	980	1015	1220	1220	1220
		G	1725	1715	2040	2290	2290
		K	1405	1595	1920	2170	2170
		W	1540	1550	2125	2075	2075
		D	70	70	80	80	80
		L	1420	1015	1650	2000	2000
		M	180	215	275	300	300
		N	160	215	275	300	300
		ØP	250	355	450	500	500
ØQ	280	395	490	540	540		
Weight (approx. - kg)			3536	5700	8950	10300	10300
Traversing Rail (kg/m)			30	37	37, 50	37, 50	37, 50

Creep - Lowhead Type Hoist

Trust our experience to manage your business


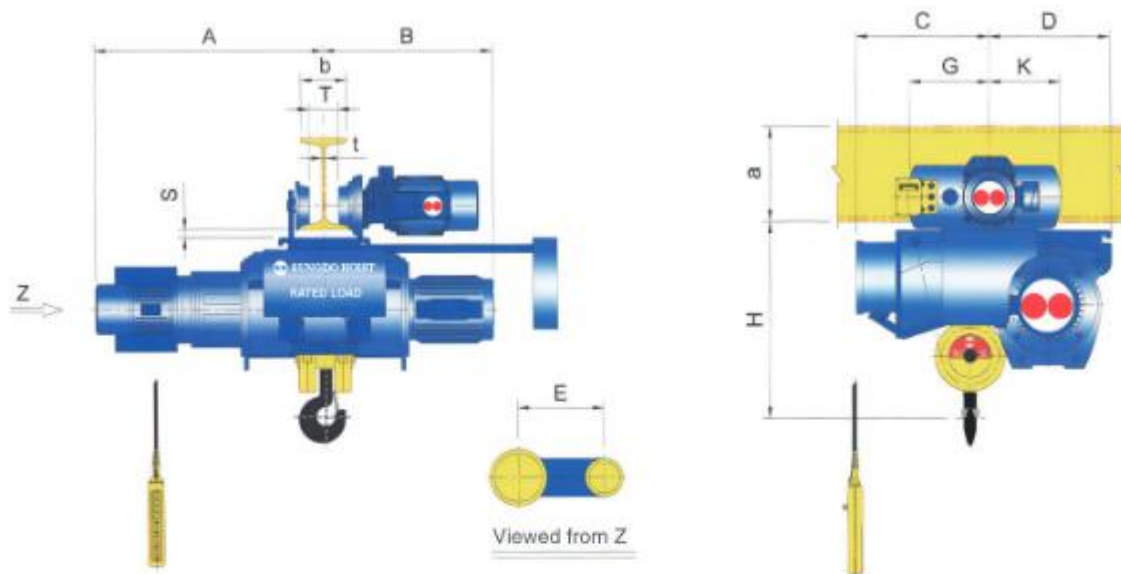


Code			SH1C-L		SH2C-L		SH2.8C-L		SH3C-L		SH5C-L	
Capacity (Ton)			1		2		2.8		3		5	
Model	Traversing Speed	High Speed	CSL1-H6-MH		CSL2-H6-MH		CSL2.8-H6-MH		CSL3-H6-MH		CSL5-H6-MH	
		Low Speed	CSL1-H6-ML		CSL2-H6-ML		CSL2.8-H6-ML		CSL3-H6-ML		CSL5-H6-ML	
Hoist	Maximum Lift (m)		6		6		6		6		6	
	Hoisting Speed High/ Creep Speed (m/min)	50 (Hz)	10 / 0.7		8.4 / 0.54		7.5 / 0.5		7.5 / 0.5		4.7 / 0.47	
		60 (Hz)	12 / 0.8		10 / 0.65		9 / 0.6		9 / 0.6		5.6 / 0.56	
	Hoisting Motor High / Creep Speed (kw x P)		2.4/0.3 x 4/6		3.7/0.3 x 4/6		5.0/1.0 x 4/6		5.5/1.0 x 4/6		5.5/1.0 x 6	
	Wire Rope	Construction	6 x 19		6 x 37, 6 x 36(WS)		6 x 37, 6 x 36(WS)		6 x 37, 6 x 36(WS)		6 x 37, 6 x 36(WS)	
		Dia.(mm) x No. of Ropes	6 x 4		8 x 4		9 x 4		9 x 4		11.2 x 4	
	Brake		DC Magnet Disc Brake									
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	17 / 20		20 / 24		20 / 24		20 / 24		20 / 24	
		Low Speed 50/60 (Hz)	12 / 14		13 / 16		13 / 16		13 / 16		13 / 16	
	Traversing Motor (kw x P)	High Speed	0.75 x 4		0.75 x 4		0.75 x 4		0.75 x 4		0.75 x 4	
		Low Speed	0.5 x 6		0.5 x 6		0.5 x 6		0.5 x 6		0.5 x 6	
Dimensions (mm) (approx.)		H	550		620		620		620		750	
		A	700		755		845		845		945	
		B	480		525		555		555		630	
		C	405		455		510		510		584	
		D	290		385		395		395		466	
		G	200		225		225		225		276	
		K	200		225		225		225		276	
		E	225		257		265		265		288	
		F	560		765		765		765		820	
I-Beam and Spacing (mm)		a x b x t	S	T	S	T	S	T	S	T	S	T
		200 X 100 X 7	38	46	34	47	-	-	-	-	-	-
		250 X 125 X 7.5	37	71	34	72	34	72	34	72	45	61
		300 X 150 X 10	37	96	34	97	34	97	34	97	45	86
		450 x 175 x 13	-	-	-	-	-	-	-	-	32	111
Min. Radius of Curvature (m)			1.5		1.8		1.8		1.8		2.3	
Weight (approx. - kg)			275		440		545		545		775	

Note 1. The size of I-Beam in section is standard for each model. Other I-Beam can also be used (spacer).
 2. If there is a curved beam then there should be indication in advance.

Creep - Double Lowhead Type Hoist

Trust our experience to manage your business

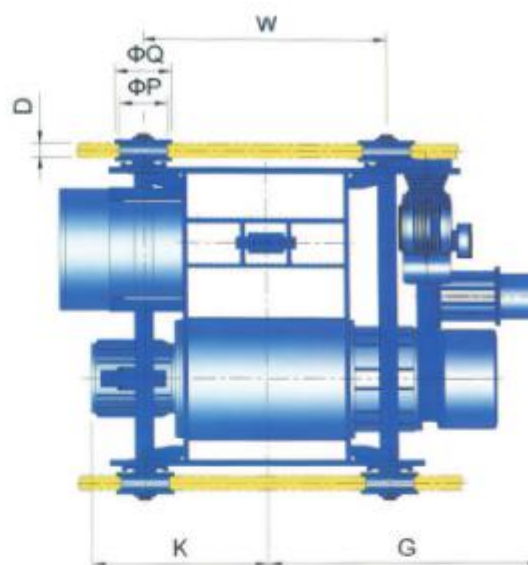
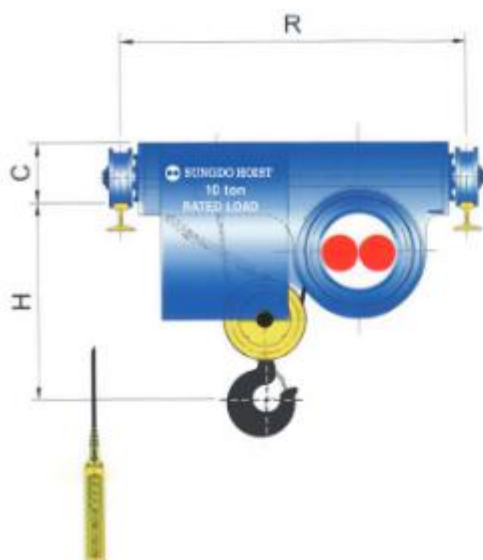


Code			SH2C-DS	SH2.8C-DS	SH3C-DS	SH5C-DS	SH7.5C-DS	SH10C-DS
Capacity (Ton)			2	2.8	3	5	7.5	10
Model	Traversing Speed	High Speed	CSDL2-H6(12)-MH	CSDL2.8-H6(12)-MH	CSDL3-H6(12)-MH	CSDL5-H6(12)-MH	CSDL7.5-H6(12)-MH	CSDL10-H12-MH
		Low Speed	CSDL2-H6(12)-ML	CSDL2.8-H6(12)-ML	CSDL3-H6(12)-ML	CSDL5-H6(12)-ML	CSDL7.5-H6(12)-ML	CSDL10-H12-ML
Hoist	Maximum Lift (m)		6 (12)	6 (12)	6 (12)	6 (12)	6 (12)	11.5
	Hoisting Speed High/ Creep Speed (m/min)	50 (Hz)	8.4 / 0.54	7.5 / 0.5	7.5 / 0.5	4.7 / 0.47	3.1 / 0.31	3.7 / 0.37
		60 (Hz)	10 / 0.65	9 / 0.6	9 / 0.6	5.6 / 0.56	3.8 / 0.38	4.5 / 0.45
	Hoisting Motor High / Creep Speed (kw x P)		3.7/0.3 x 4/6	5.0/1.0 x 4/6	5.5/1.0 x 4/6	5.5/1.0 x 6	5.5/1.0 x 6	9/1.1 x 8
	Wire Rope	Construction	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37, 6 x 36(WS)	6 x 37
		Dia.(mm) x No. of Ropes	8 x 4	9 x 4	9 x 4	11.2(12.5) x 4	14 x 4	16 x 4
	Brake		DC Magnet Disc Brake					
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	20 / 24	20 / 24	20 / 24	20 / 24	12.5 / 15	12.5 / 15
		Low Speed 50/60 (Hz)	13 / 16	13 / 16	13 / 16	13 / 16	8.3 / 10	8.3 / 10
	Traversing Motor (kw x P)	High Speed	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4	0.75 x 4
		Low Speed	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6	0.5 x 6
Dimensions (mm) (approx.)		H	585	585	585	600	950	1300
		R	950	950	950	1150	1150	1400
		C	200	200	200	200	200	250
		G	755 (905)	845 (1010)	845 (1010)	945 (1170)	970 (1170)	1255
		K	525 (675)	555 (720)	555 (720)	630 (860)	645 (845)	935
		W	730 (1060)	730 (1060)	730 (1060)	840 (1300)	840 (1300)	1245
		D	47	47	47	47	58	58
		ØP	140	140	140	165	165	165
		ØQ	170	170	170	195	195	195
Weight (approx. -kg)			465 (510)	605 (655)	605 (655)	840 (900)	850 (970)	1315
Traversing Rail (kg/m)			15	15	15	15	15	15

Note 1. Figures in () are for hoists of 12m lift
2. Lift height over 6m is available

Main & Aux Doublerail Type Hoist



Trust our experience to manage your business

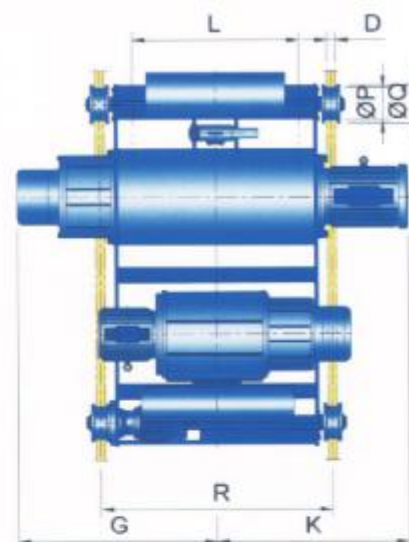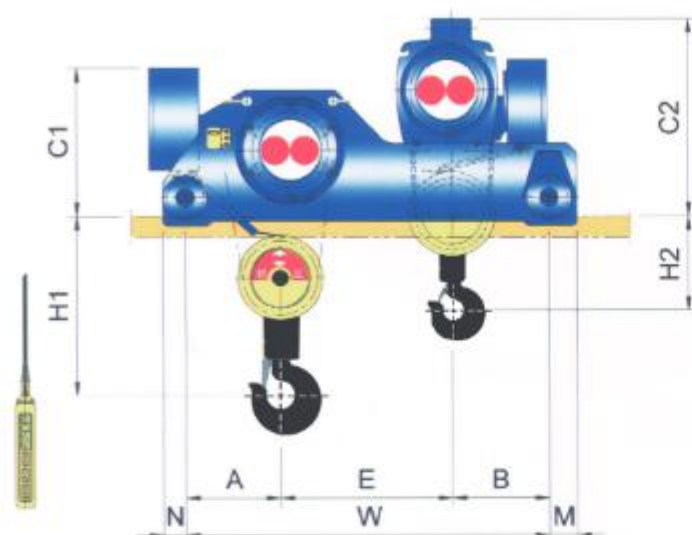

Code			SH5/3T-D		SH7.5/3T-D		SH10/3T-D		SH10/5T-D		SH15/5T-D	
Capacity (Ton)			5	3	7.5	3	10	3	10	5	15	5
Model	Hoisting / Traversing Speed	High / High	SD5/3-H12-MH		SD7.5/3-H12-MH		SD10/3-H12-MH		SD10/5-H12-MH		SD15/5-H12-MH	
		High / Low	SD5/3-H12-ML		SD7.5/3-H12-ML		SD10/3-H12-ML		SD10/5-H12-ML		SD15/5-H12-ML	
		Low / High	SD5/3-L12-MH		SD7.5/3-L12-MH		-		-		SD15/5-L12-MH	
		Low / Low	SD5/3-L12-ML		SD7.5/3-L12-ML		-		-		SD15/5-L12-ML	
Hoist	Maximum Lift (m)		12		12		11.5	12	11.5	12	12	4.7 / 5.6
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	4.7 / 5.6	7.5 / 9	3.1 / 3.8	7.5 / 9	3.7 / 4.5	7.5 / 9	3.7 / 4.5	4.7 / 5.6	3.5 / 4.2	4.7 / 5.6
		Low Speed 50/60 (Hz)	3.5 / 4.2	3.7 / 4.5	2.3 / 2.8	3.7 / 4.5	-	3.7 / 4.5	-	3.5 / 4.2	2.3 / 2.8	3.5 / 4.2
	Hoisting Motor (kw x P)	High Speed	5.5 x 6	5.5 x 4	5.5 x 6	5.5 x 4	9 x 8	5.5 x 4	9 x 8	5.5 x 6	13 x 8	5.5 x 6
		Low Speed	4.2 x 8	2.8 x 8	4.2 x 8	2.8 x 8	-	2.8 x 8	-	4.2 x 8	8.5 x 12	4.2 x 8
	Wire Rope	Construction	6 x 37, 6 x 36(WS)		6 x 37, 6 x 36(WS)		6 x 37	6 x 37, 6 x 36(WS)	6 x 37		6 x 37	
		Dia.(mm) x No. of Ropes	12.5 x 4	12.5 x 2	14 x 4	12.5 x 2	16 x 4	12.5 x 2	16 x 4	16 x 2	20 x 4	16 x 2
	Brake		DC Magnet Disc Brake									
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	20 / 24		12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15	
		Low Speed 50/60 (Hz)	13 / 16		8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10	
	Traversing Motor (kw x P)	High Speed	0.75 x 4		0.75 x 4		0.75 x 4		0.75 x 4		1.5 x 4	
		Low Speed	0.5 x 6		0.5 x 6		0.5 x 6		0.5 x 6		1.0 x 6	
Dimensions (mm) (approx.)		H1	510		730		775		775		1175	
		H2	250		350		300		400		350	
		R	1150		1150		1150		1150		1200	
		A	370		400		410		410		470	
		B	415		445		450		425		390	
		E	665		605		740		765		790	
		W	1450		1450		1600		1600		1650	
		M	119		110		110		110		140	
		N	102		95		100		100		140	
		C1	630		650		680		680		910	
		C2	850		800		810		880		970	
		G	950		940		985		985		1120	
		K	860		845		935		935		1095	
		L	890		850		850		850		870	
		D	58		58		58		58		58	
		ØP	165		165		165		165		220	
ØQ	195		195		195		195		250			
Weight (approx. - kg)		1270		1450		1700		1770		2750		
Traversing Rail (kg/m)		15		15		15		15		22		

Main & Aux Doublerrail Type Hoist



Trust our experience to manage your business

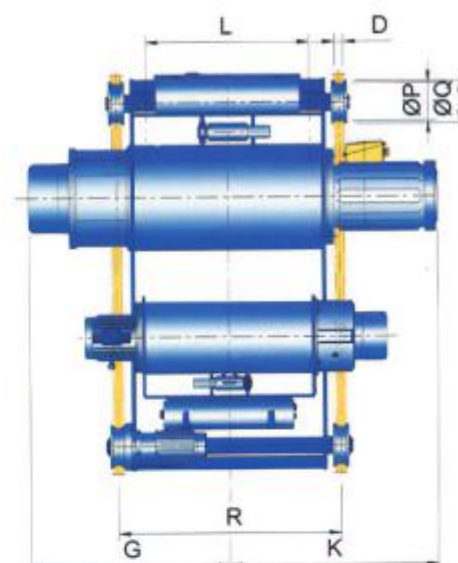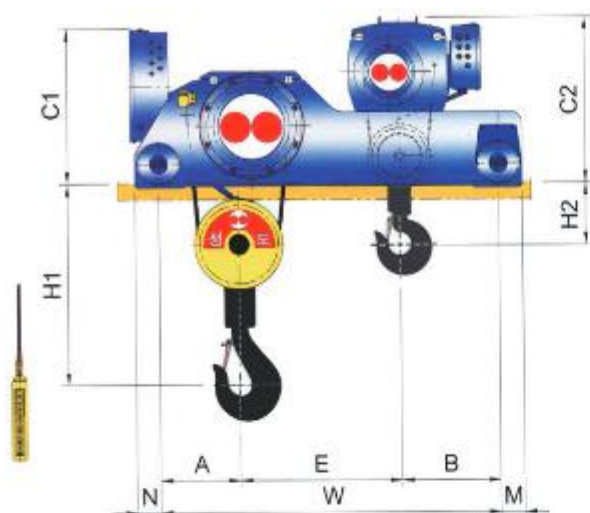

Code			SH20/5T-D		SH20/10T-D		SH30/5T-D		SH30/10T-D		SH30/15T-D		
Capacity (Ton)			20	5	20	10	30	5	30	10	30	15	
Model	Hoisting / Traversing Speed	High / High	SD20/5-H12-MH		SD20/10-H12-MH		SD30/5-H12-MH		SD30/10-H12-MH		SD30/15-H12-MH		
		High / Low	SD20/5-H12-ML		SD20/10-H12-ML		SD30/5-H12-ML		SD30/10-H12-ML		SD30/15-H12-ML		
		Low / High	SD20/5-L12-MH		SD20/10-L12-MH		SD30/5-L12-MH		SD30/10-L12-MH		SD30/15-L12-MH		
		Low / Low	SD20/5-L12-ML		SD20/10-L12-ML		SD30/5-L12-ML		SD30/10-L12-ML		SD30/15-L12-ML		
Hoist	Maximum Lift (m)		12		12	11.5	12		12	11.5	12		
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	3.5/4.2	4.7/5.6	3.5/4.2	3.7 / 4.5	2.3/2.8	4.7/5.6	2.3/2.8	3.7/4.5	2.3/2.8	3.5/4.2	
		Low Speed 50/60 (Hz)	2.3/2.8	3.5/4.2	2.3/2.8	-	1.5/1.8	3.5/4.2	1.5/1.8	-	1.5/1.8	2.3/2.8	
	Hoisting Motor (kw x P)	High Speed	17 x 8	5.5 x 6	17 x 8	9 x 8	17 x 8	5.5 x 6	17 x 8	9 x 8	17 x 8	13 x 8	
		Low Speed	11.5 x 12	4.2 x 8	11.5 x 12	-	11.5 x 12	4.2 x 8	11.5 x 12	-	11.5 x 12	8.5 x 12	
	Wire Rope	Construction	6 x 37		6 x 37		6 x 37		6 x 37		6 x 37		
		Dia.(mm) x No. of Ropes	22.4 x 4	16 x 2	22.4 x 4	16 x 4	22.4 x 6	16 x 2	22.4 x 6	16 x 4	22.4 x 6	20 x 4	
	Brake		DC Magnet Disc Brake										
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15		
		Low Speed 50/60 (Hz)	8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10		
	Traversing Motor (kw x P)	High Speed	1.5 x 4		1.5 x 4		2 x 1.5 x 4		2 x 1.5 x 4		2 x 1.5 x 4		
		Low Speed	1.0 x 6		1.0 x 6		2 x 1.0 x 6		2 x 1.0 x 6		2 x 1.0 x 6		
Dimensions (mm) (approx.)			H1	1175		1175		1480		1480		1480	
			H2	350		350		285		450		650	
			R	1300		1300		1800		1800		1800	
			A	470		470		790		790		790	
			B	440		580		455		560		590	
			E	740		950		935		900		1070	
			W	1650		2000		2180		2250		2450	
			M	140		140		180		180		180	
			N	140		140		160		160		160	
			C1	910		910		980		980		980	
			C2	970		1050		1010		1100		1400	
			G	1170		1170		1430		1430		1430	
			K	1145		1145		1405		1405		1405	
			L	935		935		1420		1420		1420	
			D	58		58		70		70		70	
			ØP	220		220		250		250		250	
			ØQ	250		250		280		280		280	
Weight (approx. - kg)			3200		3475		4200		5400		6185		
Traversing Rail (kg/m)			22		22		30		30		30		

Main & Aux Doublerail Type Hoist



Trust our experience to manage your business

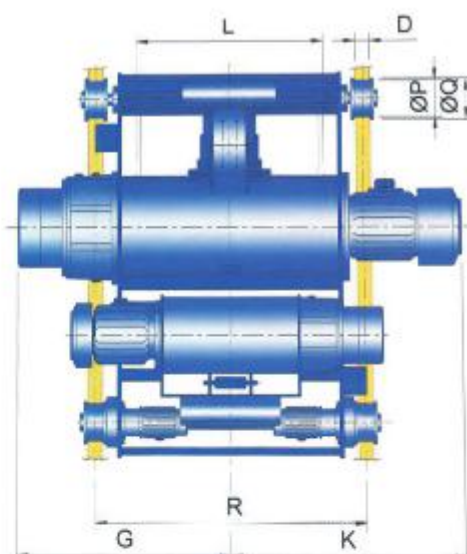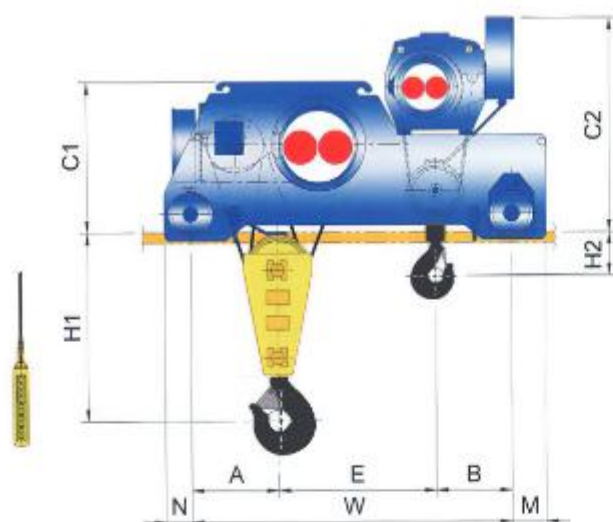

Code			SH35/10T-D		SH50/15T-D		SH60/20T-D		SH70/20T-D	
Capacity (Ton)			35	10	50	15	60	20	70	20
Model	Hoisting / Traversing Speed	High / High	SD35/10-H12-MH		SD50/15-H12-MH		SD60/20-H12-MH		SD70/20-H12-MH	
		High / Low	SD35/10-H12-ML		SD50/15-H12-ML		SD60/20-H12-ML		SD70/20-H12-ML	
		Low / High	-		SD50/15-L12-MH		SD60/20-L12-MH		SD70/20-L12-MH	
		Low / Low	-		SD50/15-L12-ML		SD60/20-L12-ML		SD70/20-L12-ML	
Hoist	Maximum Lift (m)		12	11.5	12		12		12	
	Hoisting Speed (m/min)	High Speed 50/60 (Hz)	4 / 4.8	3.7 / 4.5	2.7 / 3.2	3.5 / 4.2	2 / 2.4	3.5 / 4.2	2 / 2.4	3.5 / 4.2
		Low Speed 50/60 (Hz)		-		2.3 / 2.8		2.3 / 2.8		2.3 / 2.8
	Hoisting Motor (kw x P)	High Speed	33 x 6	9 x 8	33 x 6	13 x 8	33 x 6	17 x 8	33 x 6	17 x 8
		Low Speed		-		8.5 x 12		11.5 x 12		11.5 x 12
	Wire Rope	Construction	6xFi(25),(29) IWRC	6 x 37	6xFi(25),(29) IWRC	6 x 37	6xFi(25),(29) IWRC	6 x 37	6xFi(25),(29) IWRC	6 x 37
		Dia.(mm) x No. of Ropes	28 x 4	16 x 4	28 x 6	20 x 4	28 x 8	22.4 x 4	28 x 8	22.4 x 4
	Brake		DC Magnet Disc Brake							
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15	
		Low Speed 50/60 (Hz)	8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10	
	Traversing Motor (kw x P)	High Speed	2.2 x 4		2 x 2.2 x 4		2 x 2.2 x 4		2 x 3.7 x 4	
		Low Speed	1.5 x 6		2 x 1.5 x 6		2 x 1.5 x 6		2 x 2.2 x 6	
Dimensions (mm) (approx.)		H1	1300		1450		1750		1750	
		H2	450		350		350		350	
		R	1600		2300		2800		2800	
		A	740		985		985		985	
		B	530		635		635		635	
		E	1130		1430		1430		1430	
		W	2400		3050		3050		3050	
		M	215		275		300		300	
		N	215		275		300		300	
		C1	1015		1225		1250		1250	
		C2	1300		1680		1680		1680	
		G	1465		1790		2030		2030	
		K	1595		1920		2170		2170	
		L	1015		1650		2000		2000	
		D	70		80		80		80	
		ØP	355		450		500		500	
ØQ	395		490		540		540			
Weight (approx. - kg)			7120		10750		13500		13500	
Traversing Rail (kg/m)			37		37, 50		37, 50		37, 50	

Main & Aux Creep - Doublerail Type Hoist



Trust our experience to manage your business

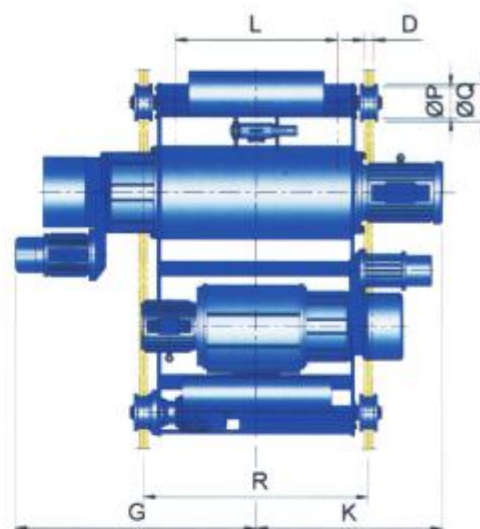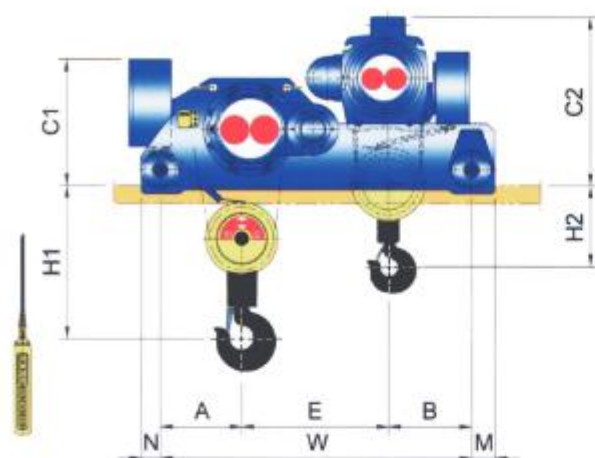

Code			SH5/3C-D		SH7.5/3C-D		SH10/3C-D		SH10/5C-D		SH15/5C-D	
Capacity (Ton)			5	3	7.5	3	10	3	10	5	15	5
Model	Traversing Speed	High Speed	CSD5 / 3-H12-MH		CSD7.5 / 3-H12-MH		CSD10 / 3-H12-MH		CSD10 / 5-H12-MH		CSD15 / 5-H12-MH	
		Low Speed	CSD5 / 3-H12-ML		CSD7.5 / 3-H12-ML		CSD10 / 3-H12-ML		CSD10 / 5-H12-ML		CSD15 / 5-H12-ML	
Hoist	Maximum Lift (m)		12		12		11.5	12	11.5	12	12	
	Hoisting High / Creep Speed (m / min)	50 (Hz)	4.7 / 0.47	7.5 / 0.5	3.1 / 0.31	7.5 / 0.5	3.7 / 0.37	7.5 / 0.5	3.7 / 0.37	4.7 / 0.47	3.5 / 0.35	4.7 / 0.47
		60 (Hz)	5.6 / 0.56	9 / 0.6	3.8 / 0.38	9 / 0.6	4.5 / 0.45	9 / 0.6	4.5 / 0.45	5.6 / 0.56	4.2 / 0.42	5.6 / 0.56
	Hoisting Motor High / Creep Speed (kw x P)		5.5 x 6 / 1.0 x 6	5.5 x 4 / 1.0 x 6	5.5 x 6 / 1.0 x 6	5.5 x 4 / 1.0 x 6	9.0 x 8 / 1.1 x 8	5.5 x 4 / 1.0 x 6	9.0 x 8 / 1.1 x 8	5.5 x 6 / 1.0 x 6	13 x 8 / 1.8 x 8	5.5 x 6 / 1.0 x 6
	Wire Rope	Construction	6 x 37, 6 x 36(WS)		6 x 37, 6x36(WS)		6 x 37	6 x 37, 6x36(WS)	6 x 37		6 x 37	
		Dia.(mm) x No. of Ropes	12.5 x 4	12.5 x 2	14 x 4	12.5 x 2	16 x 4	12.5 x 2	16 x 4	16 x 2	20 x 4	16 x 2
T / S	Brake		DC Magnet Disc Brake									
	Traversing Speed (m / min)	High Speed 50 / 60 (Hz)	20 / 24		12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15	
		Low Speed 50 / 60 (Hz)	13 / 16		8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10	
	Traversing Motor (kw x P)	High Speed	0.75 x 4		0.75 x 4		0.75 x 4		0.75 x 4		1.5 x 4	
		Low Speed	0.5 x 6		0.5 x 6		0.5 x 6		0.5 x 6		1.0 x 6	
Dimensions (mm) (approx.)		H1	510		730		775		775		1175	
		H2	250		350		300		400		350	
		R	1150		1150		1150		1150		1200	
		A	370		400		410		410		470	
		B	415		455		450		425		440	
		E	665		735		740		765		890	
		W	1450		1590		1600		1600		1800	
		M	119		110		110		110		140	
		N	102		95		100		100		140	
		C1	630		650		680		680		910	
		C2	850		800		870		910		970	
		G	1170		1170		1255		1255		1415	
		K	860		845		935		935		1095	
		L	890		850		850		850		870	
		D	58		58		58		58		58	
ØP		165		165		165		165		220		
ØQ		195		195		195		195		250		
Weight (approx. - kg)			1350		1550		1850		1900		2870	
Traversing Rail (kg / m)			15		15		15		15		22	

Main & Aux Creep - Doublerail Type Hoist



Trust our experience to manage your business

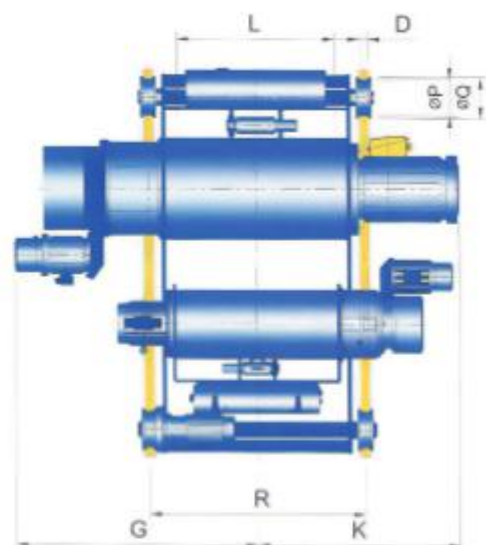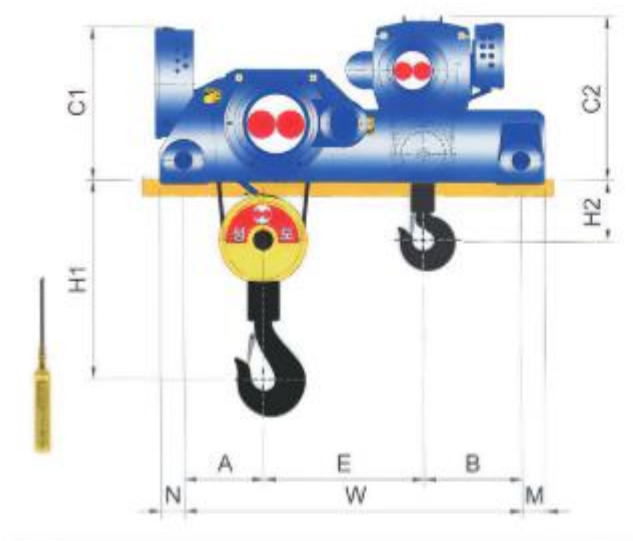

Code			SH20/5C-D		SH20/10C-D		SH30/5C-D		SH30/10C-D		SH30/15C-D	
Capacity (Ton)			20	5	20	10	30	5	30	10	30	15
Model	Traversing Speed	High Speed	CSD20/5-H12-MH		CSD20/10-H12-MH		CSD30/5-H12-MH		CSD30/10-H12-MH		CSD30/15-H12-MH	
		Low Speed	CSD20/5-H12-ML		CSD20/10-H12-ML		CSD30/5-H12-ML		CSD30/10-H12-ML		CSD30/15-H12-ML	
Hoist	Maximum Lift (m)		12		12	11.5	12		12	11.5	12	
	Hoisting Speed High/ Creep Speed (m/min)	50 (Hz)	3.5 / 0.35	4.7 / 0.47	3.5 / 0.35	3.7 / 0.37	2.3 / 0.23	4.7 / 0.47	2.3 / 0.23	3.7 / 0.37	2.3 / 0.23	3.5 / 0.35
		60 (Hz)	4.2 / 0.42	5.6 / 0.56	4.2 / 0.42	4.5 / 0.45	2.8 / 0.28	5.6 / 0.56	2.8 / 0.28	4.5 / 0.45	2.8 / 0.28	4.2 / 0.42
	Hoisting Motor High / Creep Speed (kw x P)		17 x 8 / 1.8 x 8	5.5 x 6 / 1.0 x 6	17 x 8 / 1.8 x 8	9.0 x 8 / 1.1 x 8	17 x 8 / 1.8 x 8	5.5 x 6 / 1.0 x 6	17 x 8 / 1.8 x 8	9.0 x 8 / 1.1 x 8	17 x 8 / 1.8 x 8	13 x 8 / 1.8 x 8
	Wire Rope	Construction	6 x 37		6 x 37		6 x 37		6 x 37		6 x 37	
		Dia.(mm) x No. of Ropes	22.4 x 4	16 x 2	22.4 x 4	16 x 4	22.4 x 6	16 x 2	22.4 x 6	16 x 4	22.4 x 6	20 x 4
	Brake		DC Magnet Disc Brake									
T/S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15	
		Low Speed 50/60 (Hz)	8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10	
	Traversing Motor (kw x P)	High Speed	1.5 x 4		1.5 x 4		2 x 1.5 x 4		2 x 1.5 x 4		2 x 1.5 x 4	
		Low Speed	1.0 x 6		1.0 x 6		2 x 1.0 x 6		2 x 1.0 x 6		2 x 1.0 x 6	
Dimensions (mm) (approx.)		H1	1175		1175		1480		1480		1480	
		H2	350		350		285		450		650	
		R	1300		1300		1800		1800		1800	
		A	470		470		790		790		790	
		B	440		580		460		560		570	
		E	890		950		1000		900		1090	
		W	1800		2000		2250		2250		2450	
		M	140		140		180		180		180	
		N	140		140		160		160		160	
		C1	910		910		980		980		980	
		C2	970		1050		1050		1100		1400	
		G	1465		1465		1725		1725		1725	
		K	1145		1145		1405		1405		1405	
		L	935		935		1420		1420		1420	
		D	58		58		70		70		70	
		ØP	220		220		250		250		250	
ØQ	250		250		280		280		280			
Weight (approx. - kg)		3500		3600		4600		5565		6345		
Traversing Rail (kg/m)		22		22		30		30		30		

Main & Aux Creep - Doublerrail Type Hoist


Trust our experience to manage your business

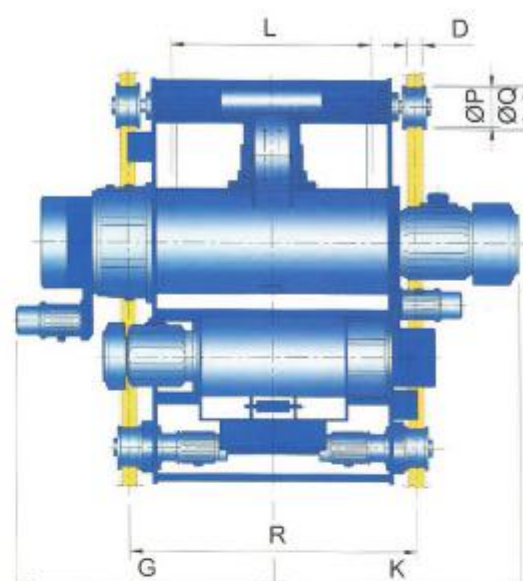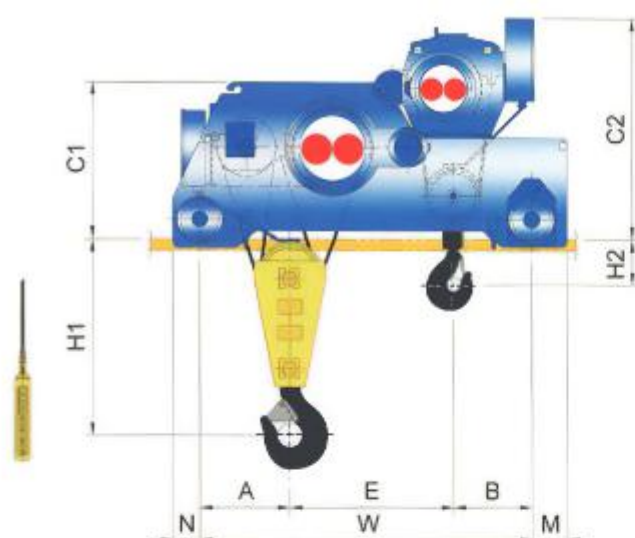

Code			SH35/10C-D		SH50/15C-D		SH60/20C-D		SH70/20C-D	
Capacity (Ton)			35	10	50	15	60	20	70	20
Model	Traversing Speed	High Speed	CSD35/10-H12-MH		CSD50/15-H12-MH		CSD60/20-H12-MH		CSD70/20-H12-MH	
		Low Speed	CSD35/10-H12-ML		CSD50/15-H12-ML		CSD60/20-H12-ML		CSD70/20-H12-ML	
Hoist	Maximum Lift (m)		12	11.5	12		12		12	
	Hoisting Speed High/ Creep Speed (m/min)	50 (Hz)	4 / 0.4	3.7 / 0.37	2.7 / 0.27	3.5 / 0.35	2 / 0.2	3.5 / 0.35	2 / 0.2	3.5 / 0.35
		60 (Hz)	4.8 / 0.48	4.5 / 0.45	3.2 / 0.32	4.2 / 0.42	2.4 / 0.24	4.2 / 0.42	2.4 / 0.24	4.2 / 0.42
	Hoisting Motor High / Creep Speed (kw x P)		33 x 6 / 3.7 x 4	9.0 x 8 / 1.1 x 8	33 x 6 / 3.7 x 4	13 x 8 / 1.8 x 8	33 x 6 / 3.7 x 4	17 x 8 / 1.8 x 8	33 x 6 / 3.7 x 4	17 x 8 / 1.8 x 8
	Wire Rope	Construction	6xFi(25),(29) IWRC	6 x 37	6xFi(25),(29) IWRC	6 x 37	6xFi(25),(29) IWRC	6 x 37	6xFi(25),(29) IWRC	6 x 37
		Dia.(mm) x No. of Ropes	28 x 4	16 x 4	28 x 6	20 x 4	28 x 8	22.4 x 4	28 x 8	22.4 x 4
	Brake		DC Magnet Disc Brake							
T / S	Traversing Speed (m/min)	High Speed 50/60 (Hz)	12.5 / 15		12.5 / 15		12.5 / 15		12.5 / 15	
		Low Speed 50/60 (Hz)	8.3 / 10		8.3 / 10		8.3 / 10		8.3 / 10	
	Traversing Motor (kw x P)	High Speed	2.2 x 4		2 x 2.2 x 4		2 x 2.2 x 4		2 x 3.7 x 4	
		Low Speed	1.5 x 6		2 x 1.5 x 6		2 x 1.5 x 6		2 x 2.2 x 6	
Dimensions (mm) (approx.)		H1	1300		1450		1750		1750	
		H2	450		350		350		350	
		R	1600		2300		2800		2800	
		A	740		985		985		985	
		B	530		635		635		635	
		E	1130		1430		1430		1430	
		W	2400		3050		3050		3050	
		M	215		275		300		300	
		N	215		275		300		300	
		C1	1015		1225		1250		1250	
		C2	1300		1680		1680		1680	
		G	1715		2040		2290		2290	
		K	1595		1920		2170		2170	
		L	1015		1650		2000		2000	
		D	70		80		80		80	
		ØP	355		450		500		500	
ØQ	395		490		540		540			
Weight (approx. - kg)		7600		11040		13790		13790		
Traversing Rail (kg/m)		37		37, 50		37, 50		37, 50		




Geared Motor

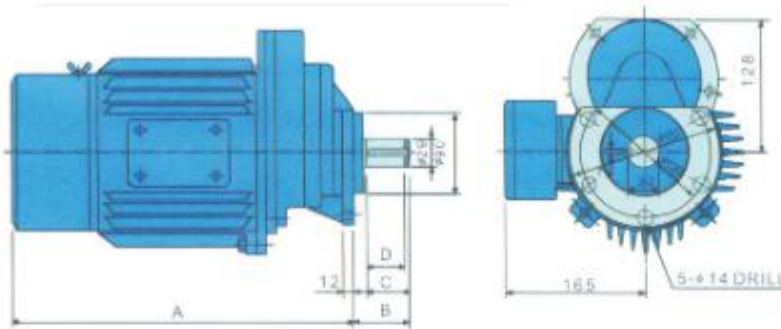


OB Type

DIMENSIONS \ CAP	0.5kw x 6P 0.75kw x 4p	1.0kw x 6p 1.5kw x 4p
A	335	335
B	89	89
C	66	66
D	60	60
REDUCE RATIO	1/8.4	1/12.12 1/16.1

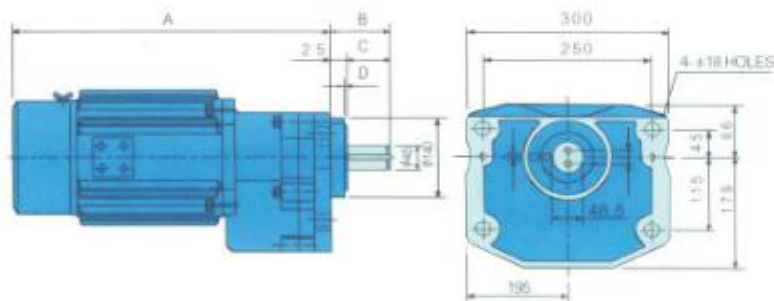


ET Type

DIMENSIONS \ CAP	1.5kw x 6P	2.2kw x 4p
A	580	580
B	84	84
C	59	59
D	5	5
REDUCE RATIO	1/19.2	

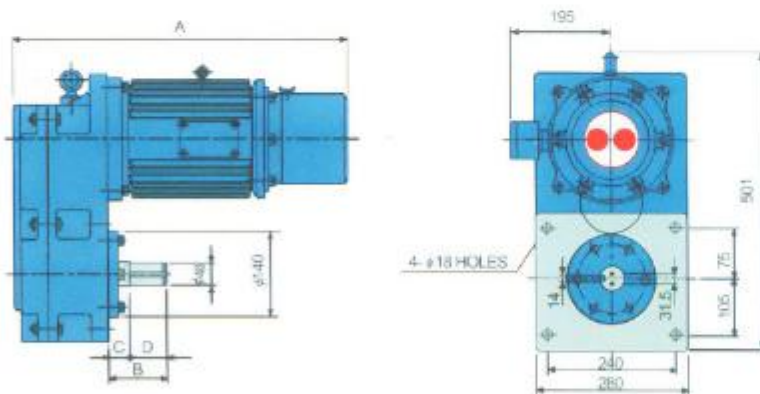

NC Type

DIMENSIONS \ CAP	2.2kw x 6p	3.7kw x 4p
A	575	575
B	95	95
C	35	35
D	60	60
REDUCE RATIO	1/22	

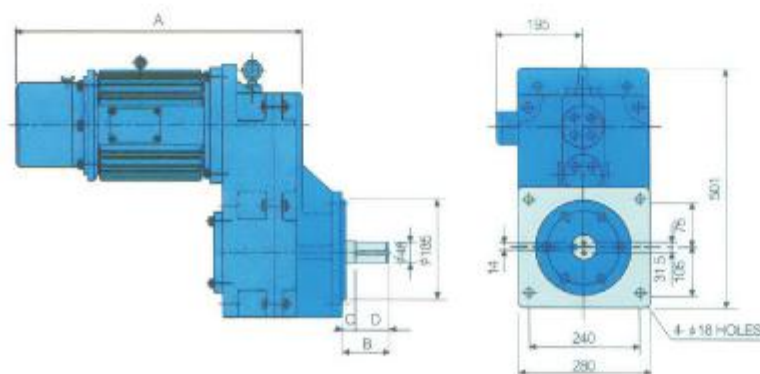

NZ Type

DIMENSIONS \ CAP	2.2kw x 6p	3.7kw x 4p
A	640	640
B	105	105
C	41	41
D	64	64
REDUCE RATIO	1/22	



Load Limiter

Sungdo Load Limiter could be accommodated to any kind of lifting products. Sungdo Load Limiter is designed as electro-electric system detecting over loaded current in order to prevent against any circumstances with over loaded hoist.



Pendant Button Switch




Geared Motor



Maximum Permissible Length for Cabtyre Cable

Cabtyre cable (Permissible length & Fuse capacity)

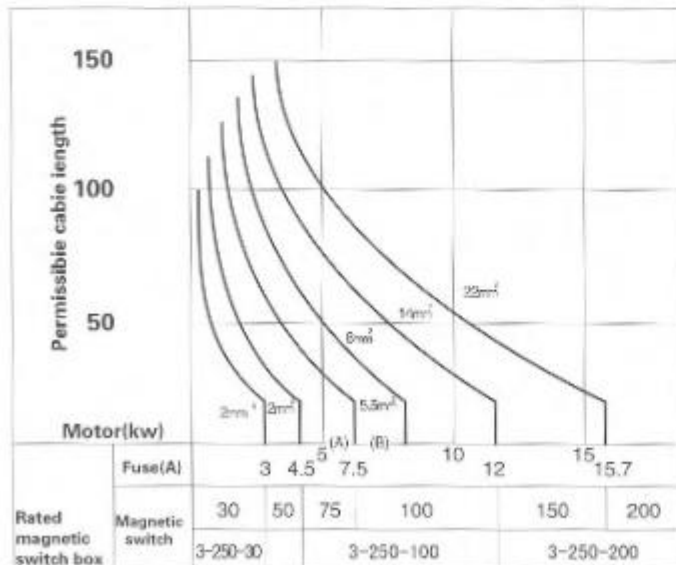

Maximum Permissible Length for I-Beam

I-Beam (Maximum permissible span)

I Beam size a x b x t	Allowable span of standard SUNGDO hoist by Capacities (m) (Supported at both ends)			
	1t	2t	3t	5t
200 × 100 × 7	4	3	-	-
250 × 125 × 75	6	4.5	3.5	2.4
300 × 150 × 10	9	7	5.5	4.3
350 × 150 × 9	9.5	8	6	5
350 × 150 × 12	11	9	7.5	6
400 × 150 × 10	-	9.5	8	5.5
400 × 150 × 12.5	-	11	9	7
450 × 175 × 11	-	-	-	7.5
450 × 175 × 13	-	-	-	8



Ordering informations of hoist 주문서

Trust our experience to manage your business

주문서 아래 빈칸을 채워주십시오 Please fill it to when you inquire our hoist

1 2 3 4 5 6 7 8 9 10 11 12 3 14 15 16

회사명 Firm name			
주소 Address		이메일 주소 E-mail	
부서명 Department		담당자 Person in charge	
연락처 Tel No.		팩스 Fax No.	

1 2 3 호이스트 용량 Hoist capacity

- | | | |
|-------------------------------------|------------------------------------|------------------------------------|
| ☐ 005 : 0.5T | ☐ 010 : 1T | ☐ 020 : 2T |
| ☐ 028 : 2.8T | ☐ 030 : 3T | ☐ 050 : 5T |
| ☐ 075 : 7.5T | ☐ 100 : 10T | ☐ 150 : 15T |
| ☐ 200 : 20T | ☐ 300 : 30T | ☐ 350 : 35T |
| ☐ 400 : 40T | ☐ 450 : 45T | ☐ 500 : 50T |
| ☐ 600 : 60T | ☐ 700 : 70T | |

4 호이스트 종류 Kind of hoist

- | | |
|---|--------------------------------------|
| ☐ N : Ordinary type | ☐ S : N+Creep |
| ☐ L : Low Head type | ☐ R : L+Creep |
| ☐ D : Double Rail type | ☐ Q : D+Creep |
| ☐ A : Combined type | ☐ G : A+Creep |

5 권상속도 Hoisting speed

- ☐ H : High speed
☐ L : Low speed
☐ Z : Non standard speed

6 7 호이스트 양정 Hoisting lift

- | | |
|------------------------------------|------------------------------------|
| ☐ 06 : 6 m | ☐ 18 : 18 m |
| ☐ 12 : 12 m | ☐ 24 : 24 m |

8 횡행 구동방법 Trolley type

- ☐ P : Hand push trolley
☐ M : Motor driven trolley
☐ C : Geared trolley

9 횡행속도 Trolley speed

- ☐ H : High speed
☐ L : Low speed
☐ Z : Non standard speed

10 주전원 Main power voltage

- | | | |
|--|--|--|
| ☐ 1 : 220V 50Hz | ☐ 2 : 220V 60Hz | ☐ 3 : 380V 60Hz |
| ☐ 4 : 440V 60Hz | ☐ 5 : 460V 60Hz | ☐ 6 : 480V 60Hz |
| ☐ 7 : 380V 50Hz | ☐ 8 : 415V 50Hz | ☐ 9 : 400V 60Hz |
| | ☐ A : 440V 50Hz | ☐ B : 400V 50Hz |

11 조작전원 Control voltage

- | | | |
|-------------------------------------|---|------------------------------------|
| ☐ A : AC220V | ☐ B : AC110V(표준) | ☐ C : AC48V |
| ☐ D : AC24V | ☐ E : AC12V | ☐ F : DC48V |
| ☐ G : DC24V | ☐ H : DC12V | ☐ Z : 특수사항 |

12 사용지역 Hoist application area

- ☐ N : 보통지역 Ordinary site
☐ W : 방수지역 Water proofing site
☐ A : 내산지역 Acid resistance site
☐ X : 방폭지역 Explosion-proof

13 Number of pushbutton point

- | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| ☐ 5 P : 5 | ☐ 6 P : 6 | ☐ 7 P : 7 |
| ☐ 8 P : 8 | ☐ 9 P : 9 | ☐ 12 P : A |
| ☐ 11 P : B | ☐ 12 P : C | |

* EM, Lamp, 지시등도 각각 1 Point 추가됩니다

14 절연종류 Insulation group of motor

기호 CODE	절연종류 Insulation group	최고온도 Max. Ambient temp.
☐ Y	Y종	90
☐ A	A종	105
☐ E	E종	120
☐ B	B종	130
☐ F	F종	155
☐ H	H종	180
☐ C	C종	180 ~

15 과부하 방지장치 종류 Safety device

- ☐ L : Load limiter(Digital type) (Standard)
☐ C : Load cell

16 Main magnet contactor

- ☐ Yes 포함 (모노레일 호이스트 용도로 사용시)
☐ No 제외 (Crane 용도로 사용시)

Note : 1. 호이스트 사양이 비표준일 경우 별도 메모해 주시기 바랍니다.
 2. 갈라사양은 당사 표준사양입니다.



KCI CRANE

Head Office & Factory

81/9 Moo 2, Sam Khok Sub-district,
Sam Khok District,
Pathum Thani Province, 12160
TEL : 02-979-1400-8

Northern Branch

442/1 Moo 11, Chomphu Sub- district,
Mueang Lampang District,
Lampang Province, 52100
TEL : 05-433-7470-2, 05-425-0611-3

Website

cranekci.com

E-mail

kci@cranekci.com

Eastern Branch

77/45-46 Moo 10, Napa Sub-district,
Mueang Chonburi District,
Chonburi Province, 20000
TEL : 03-878-6970-2

Northeast Branch

2555/20-21 Moo 4, Khok Si Sub- district,
Mueang Khon Kaen District,
Khon Kaen Province, 40000
TEL : 04-330-6521-2

Line

kcicrane2541

Facebook

KCI Engineering



SUNGDO HOIST

에스디호이스트

주소 경기도 김포시 양촌읍 황금산단로 7
TEL 032-565-9111 FAX 032-565-9116
E-mail sales@sdhoist.co.kr

SD HOIST

ADD 7, Hwanggeumsandan-ro, Yangchon-eup,
Gimpo-si, Gyeonggi-do, Republic of Korea
TEL +82-32-565-9111 FAX +82-032-565-9116
E-mail sales@sdhoist.co.kr

성도기계

주소 경기도 김포시 양촌읍 황금로128번길 56
TEL 032-565-9111 FAX 032-565-9116
E-mail sales@sdhoist.co.kr

SUNGDO MACHINERY

ADD 56, Hwanggeum-ro 128beon-gil, Yangchon-eup,
Gimpo-si, Gyeonggi-do, Republic of Korea
TEL +82-32-565-9111 FAX +82-032-565-9116
E-mail sales@sdhoist.co.kr

sdhoist.co.kr

본 카탈로그는 참고용입니다. 제작 시점에 따라 실제 판매모델과 차이가 있을 수 있으므로, 구입 시에는 반드시 영업부 또는 기술부의 안내를 받으시기 바랍니다.

This catalog is for reference only. There may be differences from the actual sales model depending on the time of production. When purchasing, be sure to seek guidance from the sales or technical department.