


LED DOB Highbay

Economic choice for basic lighting requirement.



Simple design



Water & Dust Proof



Nice heat dissipation



Installation friendly

VOLTAGE
220-240V

FREQUENCY
50/60Hz

LIFE TIME
30000hours

CRI
Ra80

WORKING TEMPERATURE
-20-45°C

POWER FACTOR
0.9

IP RATE
IP65

MATERIALS & COLOR
Body:ADC(Black)
Lens:PC(Transparent)

INSTALLATION TYPE
Hanging
Bracket mounting

Cost-effective

Product can satisfied the basic lumination demands for small-scale warehouses, factories, logistic centers etc., in where cares about making the worth use of limited budget in limited space or low ceiling height facilities.

Excellent heat dissipation

Specificly selected die-casted aluminium material provides nice heat dissipation performance, which helps reduce the risk of shortened lifetime causing by overheat.


Various options of accessories

Equipped with hanging chain and safety wire for double safety assurance. Also a one-step-buckled water proof socket makes your installation more fast and simple. Product can adapt to common types of hanging frame can achieve multiple types of mounting method by self-purchased accessories.

100W

Beam Angle	90°
4000K	NYV20001BE1A 12000lm, 120lm/W
5000K	NYV20051BE1A 12000lm, 120lm/W
6500K	NYV20061BE1A 12000lm, 120lm/W
Photometric Distribution	


100W

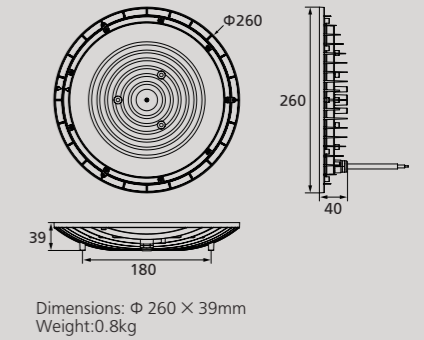

150W

Beam Angle	90°
4000K	NYV20002BE1A 18000lm, 120lm/W
5000K	NYV20052BE1A 18000lm, 120lm/W
6500K	NYV20062BE1A 18000lm, 120lm/W
Photometric Distribution	


150W

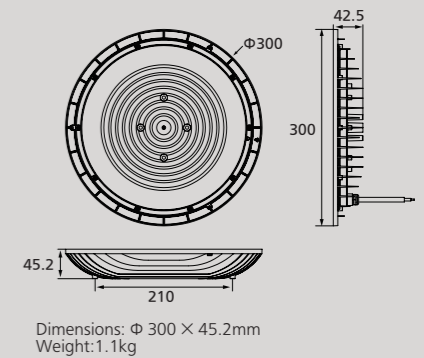

200W

Beam Angle	90°
4000K	NYV20003BE1A 24000lm, 120lm/W
5000K	NYV20053BE1A 24000lm, 120lm/W
6500K	NYV20063BE1A 24000lm, 120lm/W
Photometric Distribution	

200W

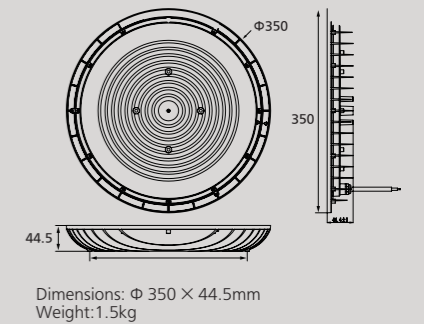

Panasonic[®]



LED High Bay
100W



NYV20061BE1A



*Included Attached safety wire, Ring, Connected waterproof socket with 30 cm cable, Chain.

6500K Cool Daylight

12000lm



Panasonic[®]



LED High Bay
150W



NYV20062BE1A



*Included Attached safety wire, Ring, Connected waterproof socket with 30 cm cable, Chain.

6500K Cool Daylight

18000lm



Panasonic[®]



LED High Bay
200W



NYV20063BE1A



*Included Attached safety wire, Ring, Connected waterproof socket with 30 cm cable, Chain.

6500K Cool Daylight

24000lm



RECOMMENDATION OF MOUNTING HEIGHT

Ceiling Height

