




## MULTILAYER A/C PIPE

for air-conditioning use

### FEATURES

Designed for split-type, cooling air-conditioner.  
 Competible with popular refrigerants:  
 R-22, R410A, R32, etc.

Working Temperature = 60°C  
 Working Pressure = 3.8 Mpa = 551 psi

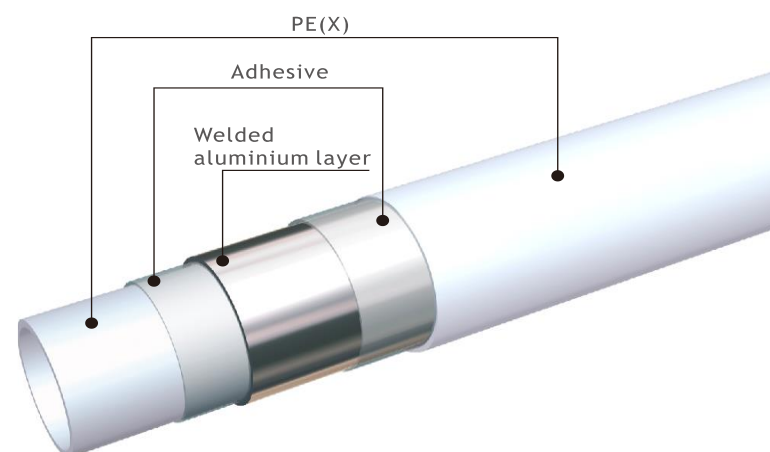

### SIMPLE PRODUCT RANGE



Brass adapter



A/C pipe - white



A/C pipe - gold

### QUICK & SAFE INSTALLATION



1. Cut the pipe vertically with a pipe cutter.



2. Round and bevel the end with a plastic reamer



3. Put the nut and ring over the pipe, push the fitting into the pipe up to shoulder.



4. Use two spanners to tighten it up completely.

### MORE ADVANTAGES



**Away from Risk**  
NO hot work involved



**Anti-corrosion**  
plastic feature



**45% Lighter**  
than copper



**3X Smoother**  
than copper

### CONTACT

RIFENG THAILAND CO., LTD.

W : rifeng.co.th  
 T : 02-9769810-3  
 A : 189 Wong Sawang Rd, Bang Sue District, Bangkok 10800, Thailand