


HEAVY DUTY PRECISION LATHE

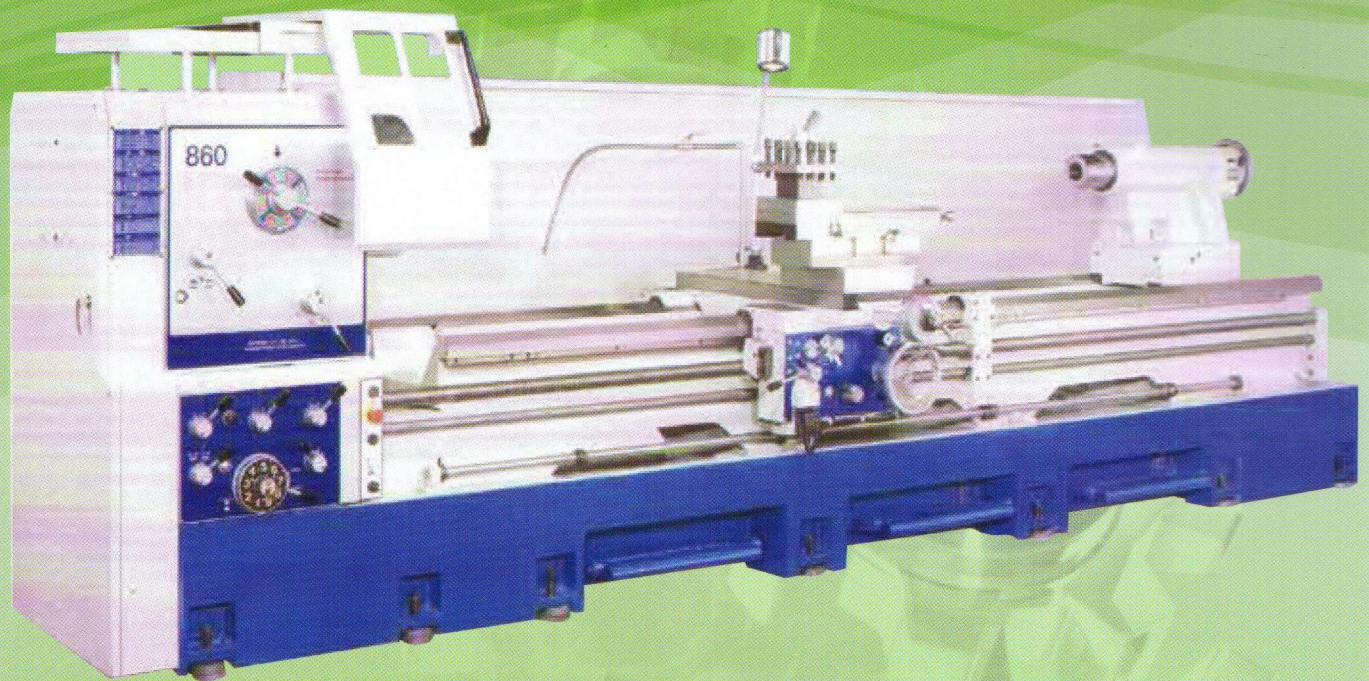

SPECIFICATIONS

ITEM	項目	X-33			X-37			X-41		
		X-3370	X-3390	X-33130	X-33170	X-33210	X-33250	X-33290	X-33330	
Model	機種	X-3770	X-3790	X-37130	X-37170	X-37210	X-37250	X-37290	X-37330	
		X-4170	X-4190	X-41130	X-41170	X-41210	X-41250	X-41290	X-41330	
Swing Over Bed	床面上最大旋徑	860 mm (34")			960 mm (38")			1060 mm (42")		
Swing Over Cross Slide	橫送台上最大旋徑	610 mm (24")			710 mm (28")			810 mm (32")		
Swing Over Gap	凹口上最大旋徑	1170 mm (46")			1260 mm (50")			1360 mm (54")		
Width of Gap	凹口工作寬度	475 mm (19")								
Center Distance (mm)	兩心間距離 (mm)	1810(72")	2310(92")	3310(132")	4310(172")	5310(212")	6310(252")	7310(292")	8310(332")	
Max. Length for Workpiece	加工件最大長度	1650	2150	3150	4150	5150	6150	7150	8150	
Spindle Bore	主軸孔徑	153 mm (6") / 230 mm (9") (OPT.)								
Spindle Nose	主軸鼻端	A2-11 / A2-15 (OPT.)								
Taper of Spindle Bore	主軸通孔錐度	MT7# / 1/20(OPT.)								
Spindle Speed	主軸轉速範圍	8-680 rpm / 6-500 rpm								
Spindle Speed	主軸變換段速	12 Steps/ 段								
Spindle Center To Ground	主軸中心至地面高度	1178			1228			1278		
Longitudinal Feeds Range	縱向進刀量範圍	0.05 ~ 0.7 mm/rev								
Cross Feeds Range	橫向進刀量範圍	0.025 ~ 0.35 mm/rev								
Rapid Traverse Z/X Axis	快速移動	Z Axis = 3.7 M/min / X Axis = 1.8 M/min								
Inch Threads Range	英製螺紋	2 ~ 28牙 / in (D.P. 4-56)								
Metric Threads Range	公製螺紋	0.8 ~ 14 mm (M.P. 0.5-7)								
Leadscrew pitch	導螺桿直徑	ø45 x 2 TPI / P12 mm (OPT.)								
Cross slide Travel	橫送台移動範圍	480 mm								
Compound Rest Travel	複式刀座移動範圍	330mm (13")								
Tool Shank	使用刀柄	32 x 32								
Tail Spindle Diameter	尾座心軸直徑	ø120 mm (4")								
Tail Spindle Travel	尾座心軸行程	250 mm (10")								
Taper of Tail Center	尾座頂心斜度	MT6#								
Bed Width	床面寬度	510 mm (20")								
Spindle motor	主軸馬達	20HP / 30HP (OPT.)								
Bed	床體	One piece 一體成型								
Machine Dimensions (cm)	佔地面積 (cm)	375 x 174	425 x 174	525 x 174	625 x 174	725 x 174	825 x 174	925 x 174	1025 x 174	
Net Weight (Kgs)	重量 (Kgs)	5700	6100	6800	7600	8400	9200	10000	10800	
Packing Dimensions (cm)	裝箱尺寸 (cm)	400 x 185 x 208	425 x 185 x 208	531 x 185 x 208	625 x 185 x 208	750 x 185 x 208	850 x 185 x 208	950 x 185 x 208	1050 x 185 x 208	